




SOUTH WEST ELEVATION

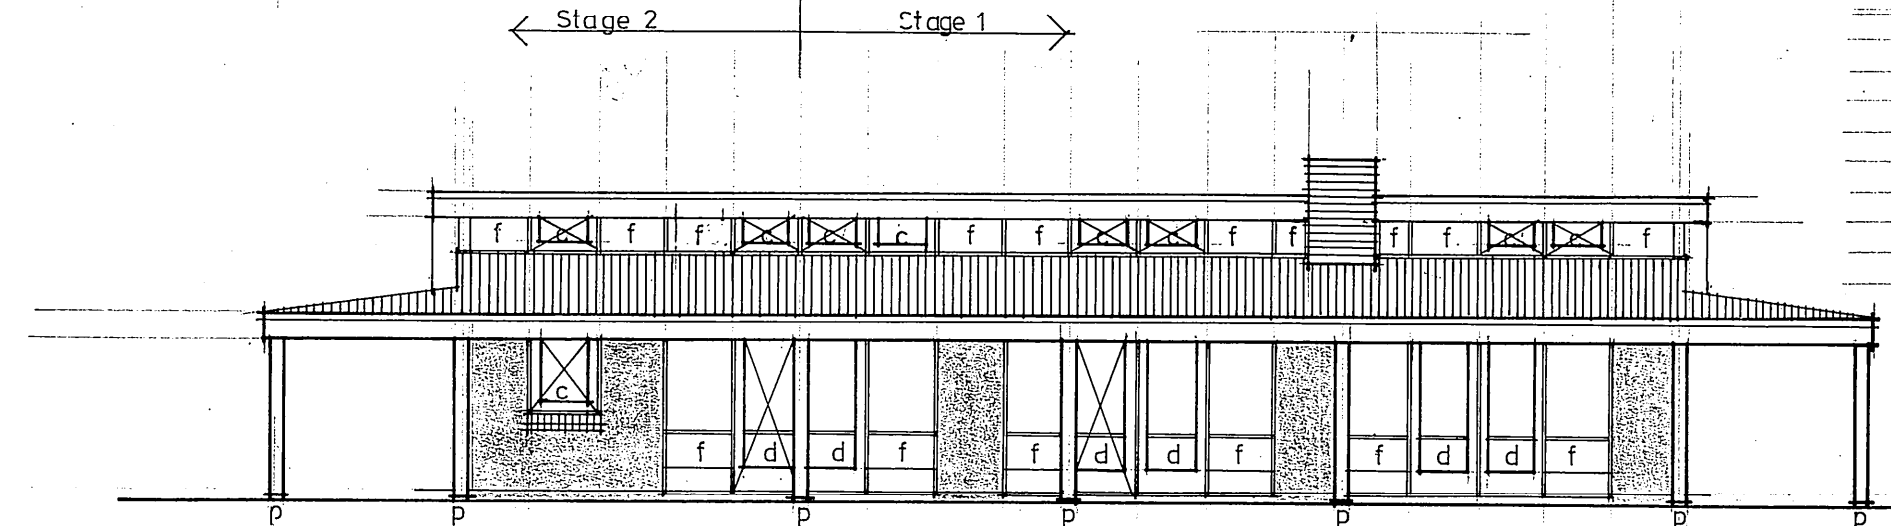

NORTH EAST ELEVATION

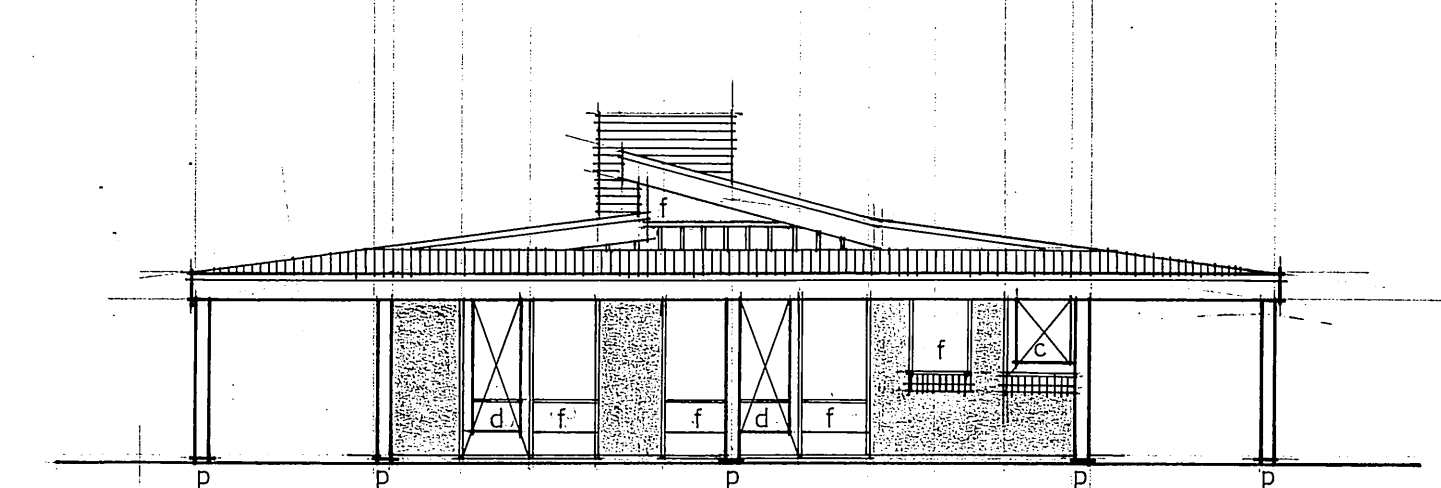

NORTH WEST ELEVATION (stage 2)

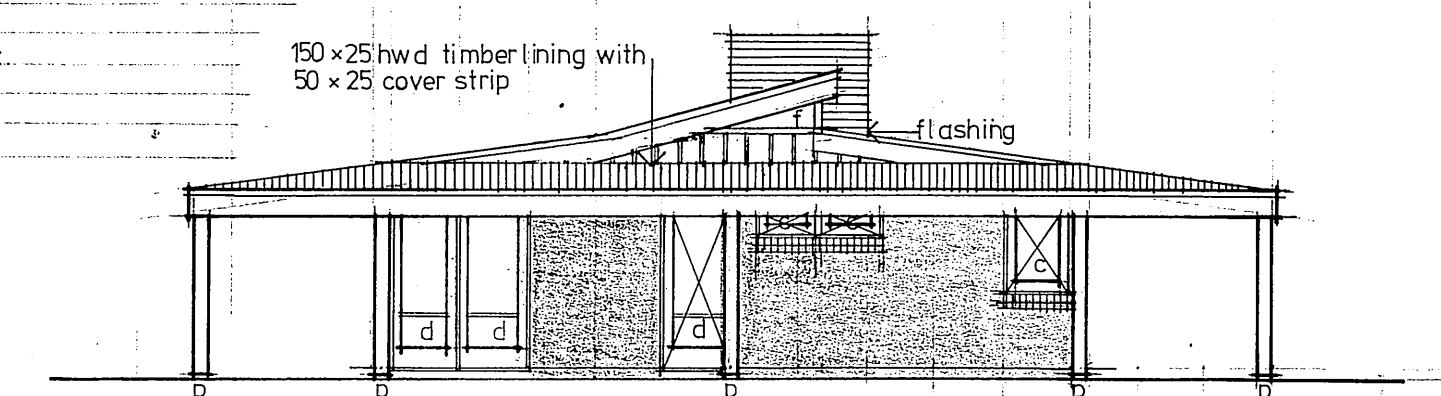

SOUTH EAST ELEVATION

- LEGEND
- c casement window
 - d glass door
 - f fixed glass
 - cross on elevations indicates flywires
 - p verandah posts
 - dp down pipes
 - shading indicates adobe brickwork


150x25 hwd timber lining with 50 x 25 cover strip

flashing

temporary timber wall

NORTH WEST ELEVATION (stage 1)

- | | |
|--|--|
| 1. Custom orb roof deck fixed to battens with screws. | 15. Reinforced concrete slab (see engineers detail drawings). |
| 2. 75x50 hardwood battens on edge at 900 mm centres. | 16. Waterproof membrane. |
| 3. 50 mm thick (min.) rolled fibreglass insulation and double sided silisolation | 17. 50 mm packing sand. |
| 4. 19 mm tongue and groove flooring | 18. Nom. 150 mm sq. millsawn oregon verandah posts. |
| 5. 200x75 millsawn oregon rafters at 1800 mm cts. | 19. External paving to fall away from building |
| 6. 400x75 " " beam under clerestory | 20. 450 sq x 450 deep isolated pad footing under verandah posts. |
| 7. 300x75 " " beam | 21. 300 mm x 75 mm concealed box gutter. |
| 8. 350x50 " " fascia | 22. Clerestory sill flashing. |
| 9. 300x50 " " clerestory fascia. | 23. Fixed ventilation and packer between rafters over windows. |
| 10. Clerestory windows. | |
| 11. Window wall - constructed from 150x75 millsawn oregon. | |
| 12. Brick on edge sill, flashing under. | |
| 13. Layout brickwork under adobe walls containing dampproof course etc. | |
| 14. Selected floor finish. | |

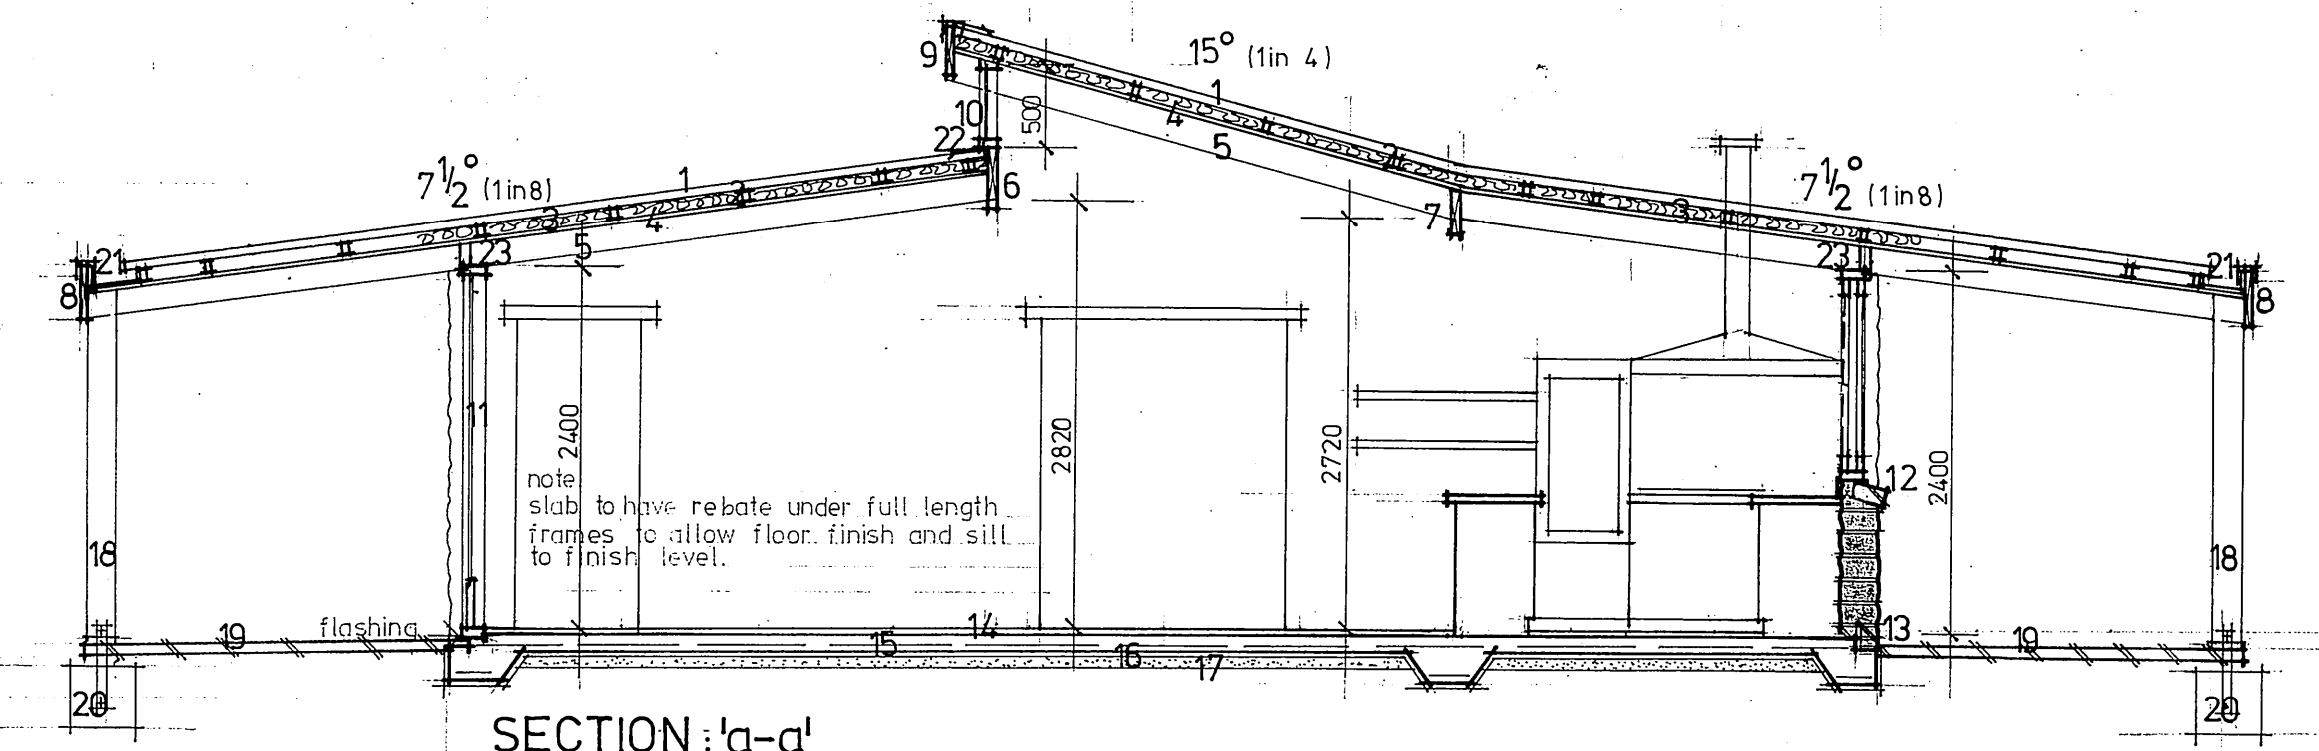

SECTION: 'a-a'

PLAN.

NOTES

- all oregon to be stress graded at F7 (except rafters with 3/4 span - F8)
- glazing to comply with A.S.1288 - if chair rail installed to be set at 750 mm above floor level.
- protect below slab against sub-terrian pests.

MORRIS HOUSE
CLARKE ROAD, NYORA.
ALISTAIR KNOX AND ASSOCIATES
MOUNT PLEASANT ROAD, ELTHAM. (03) 4397404
DATE APRIL 1983. SCALE 1:100, 1:50

WORKING DRAWING. SHEET 1 OF 2
AMENDMENTS + COMPLETION OF DRAWING - SEPTEMBER 1983.
TO COUNCIL REQUIREMENTS - NOVEMBER 1983.

JOB NO. 1203.