





NOTES:
all Oregon unless otherwise specified to be F7,
treat under brick floor against sub-terrian pests.
all second hand building materials must be approved
by the building surveyor.
internal timber nonload bearing walls to be framed
in 90 mm x 38 mm or 75 mm x 50 mm F5 pinus radiata
and lined with tongue and groove flooring or similar
all dimensions and conditions to be checked on site and
any variations to be checked with this office.

LEGEND


f	fixed glazing	to comply with A.S.1288
c	casement	(chair rail at 750 mm if required)
d	glass door	see detail
dp	downpipe	100 mm x 75 mm galv. or 90 mm Ø pvc
X	on elevations indicates	flywires
shading on elevations indicates	adobe brickwork	75 mm insulation and double sided insulation



SECTION: a-a

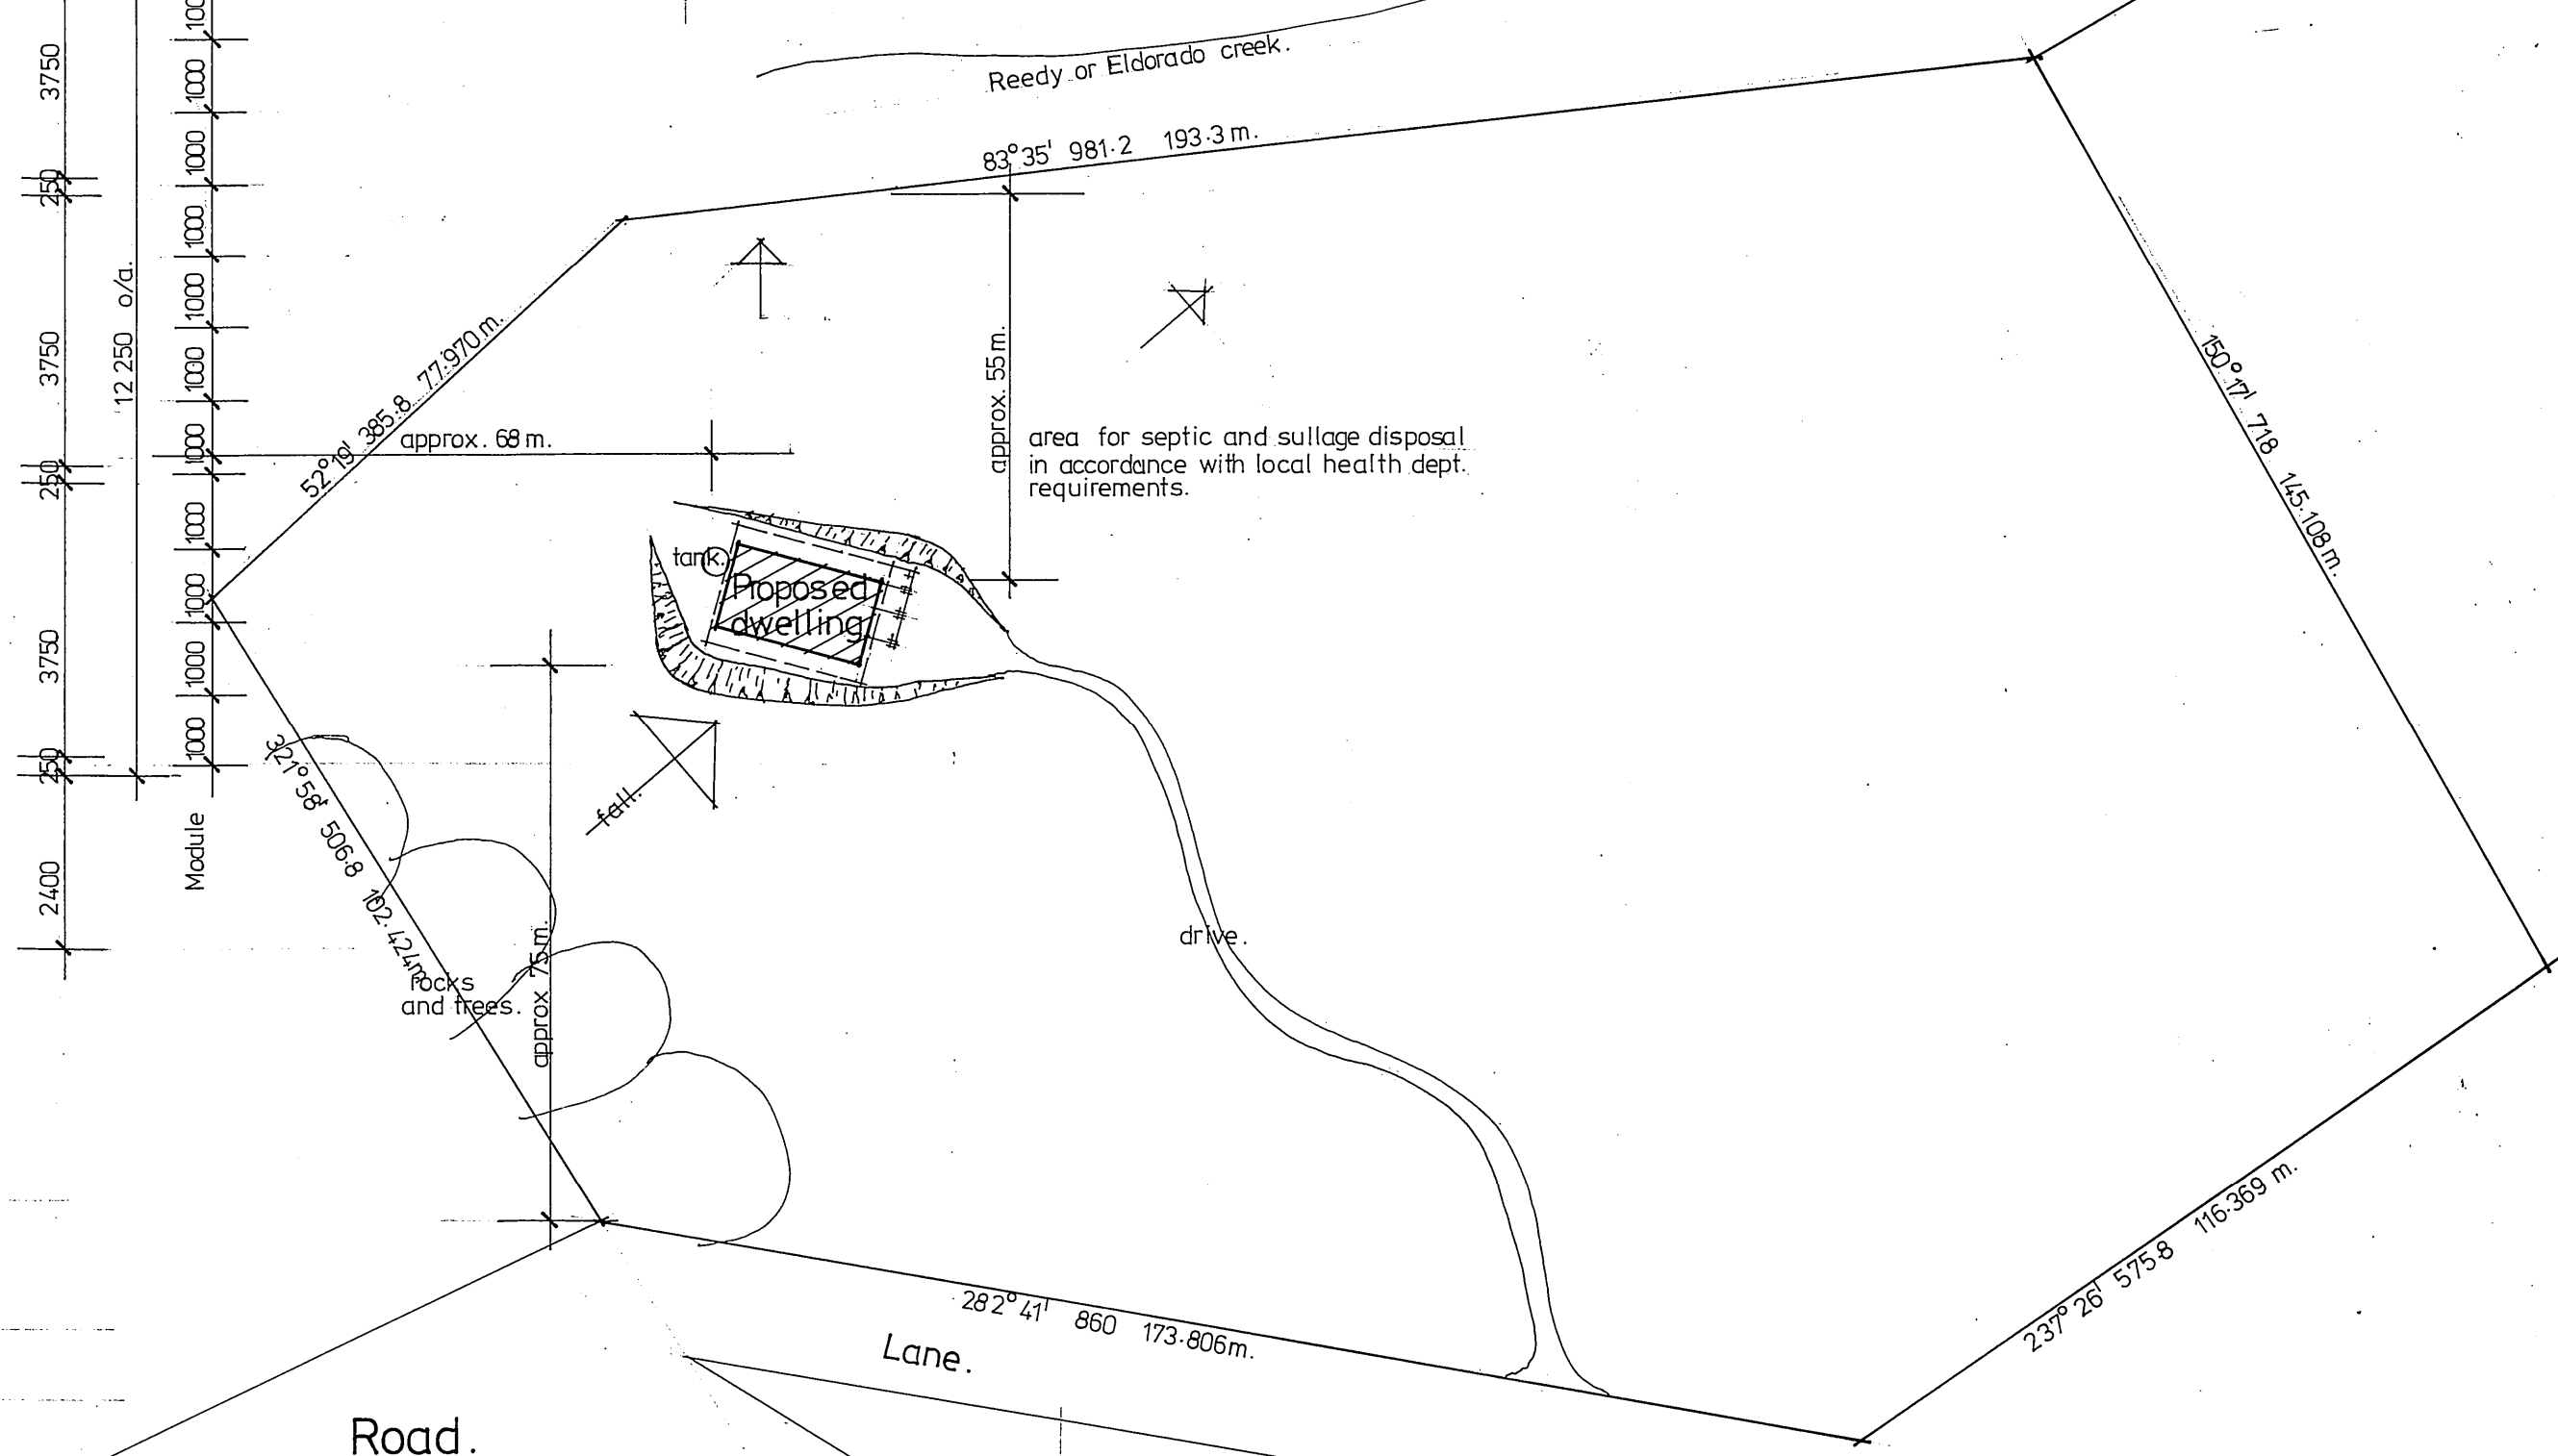

SITE PLAN.

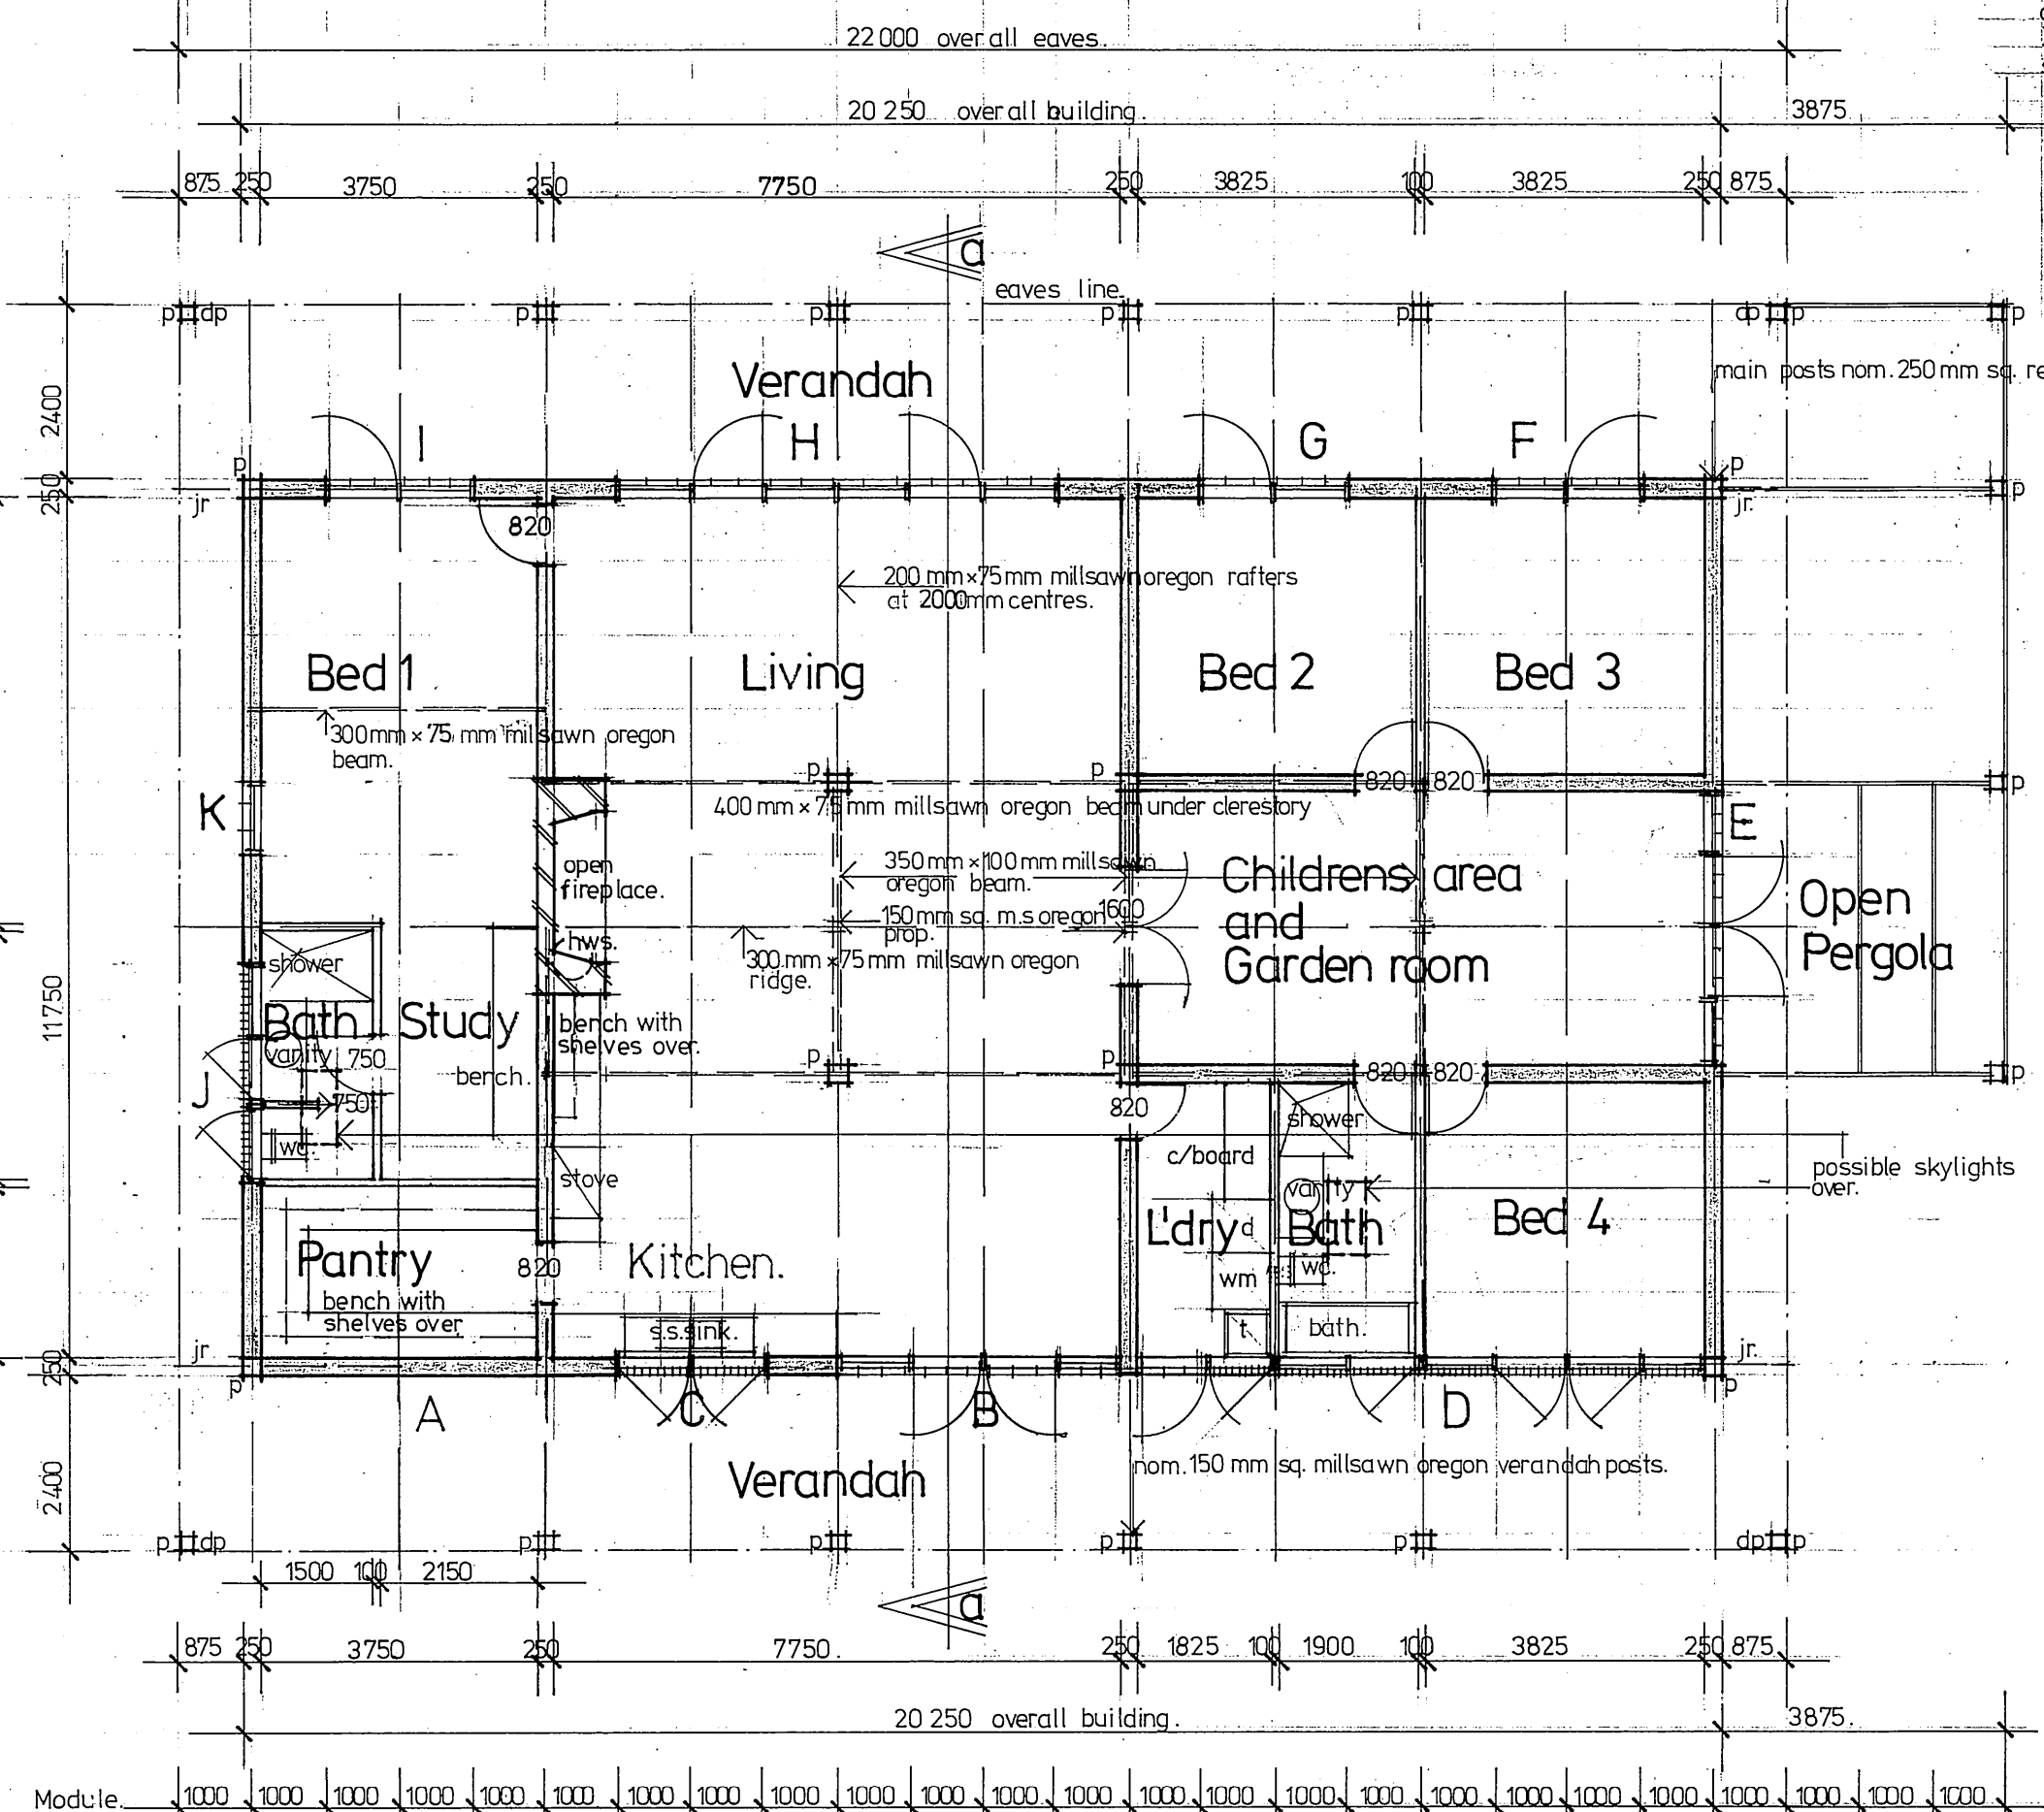

PLAN.

Designed by
Alistair Knox and Associates
Mount Pleasant road, Eltham. (03) 439-7404

Amendments - August 1983
Scales : 1-100 ; 1-1000
Date : November 1982

Working drawing
SKERMER HOUSE
ELDORADO