


North Elevation

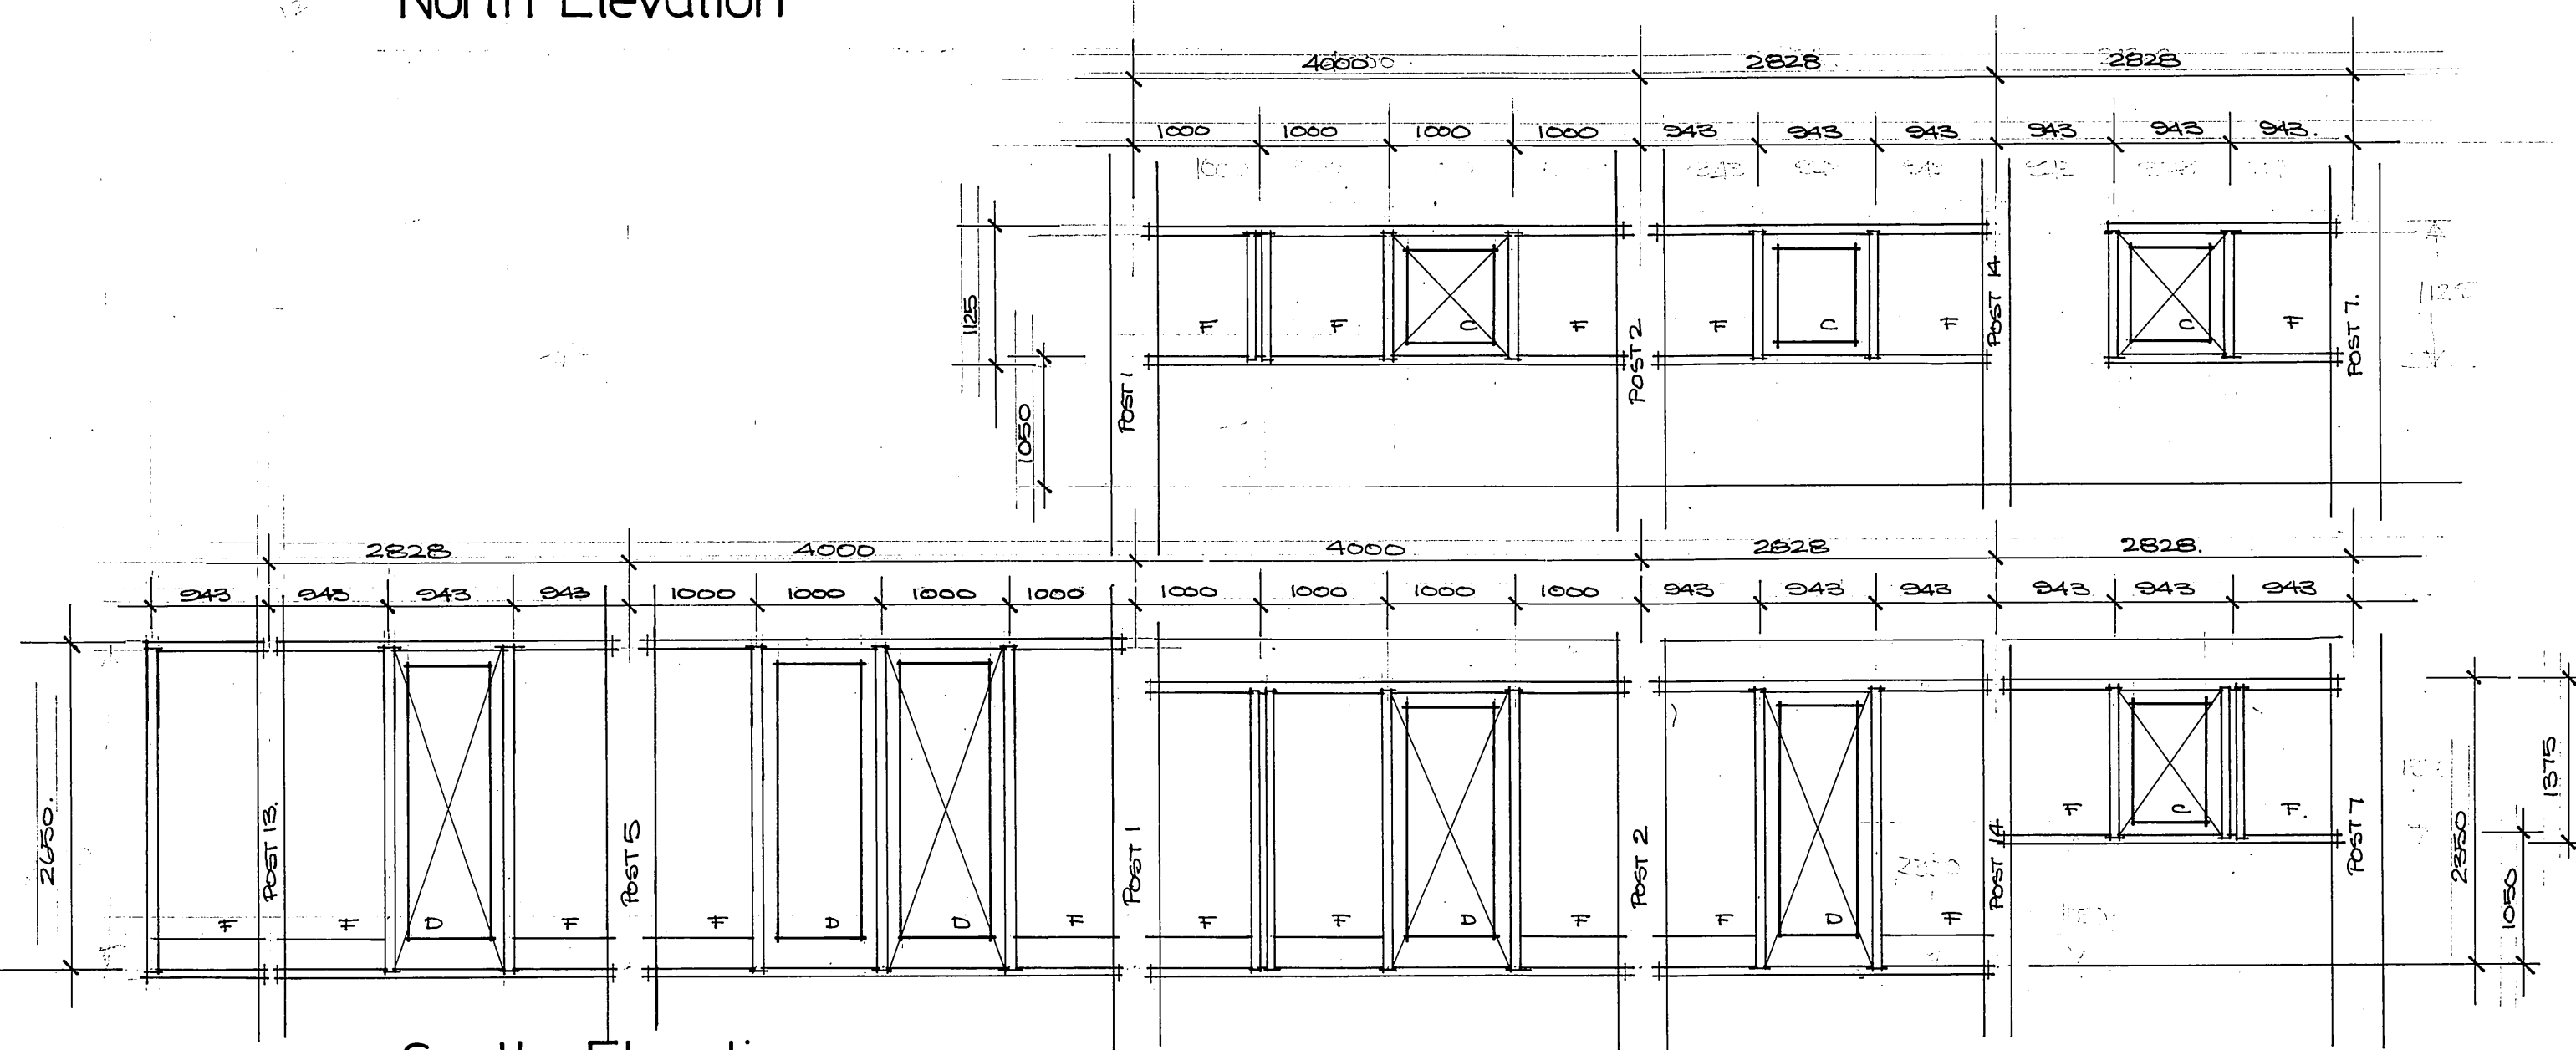

South Elevation

ASSUME - FRAMES TO BE CONSTRUCTED FROM EX 150mm x 75mm SECOND HAND  
OREGON - PLANT ON STOPS EX 50mm x 12mm KDHW - GLASS REBATED INTO  
POSTS - KICKPLATES TO BE EX 300mm x 75mm  
- SILLS TO FULL LENGTH FRAMES TO BE JARRAH OR SIMILAR DURABLE MATERIAL  
- DOORS + CASEMENTS - KILNDRIED HARDWOOD

ALL SECOND HAND MATERIAL TO BE APPROVED BY THE BUILDING SURVEYOR  
FRAMES TO BE CHECKED BY THE BUILDER

STEVENS HOUSE  
Window detail.  
Alistair Knox + Associates. 439 7404.