

SPECIFICATION.

steel tray roof deck on battens at 1200 mm max cts. graded from 125 mm x 50 mm to 50 mm x 50 mm.

Gutter. 300 mm x 75 mm gutter into 100 mm x 75 mm downpipes.

Main beams. 350 mm x 100 mm ms. oregon beams.

Purlins. 200 mm x 75 mm ms. oregon purlins at 1000 mm cts.


Lining. 20 mm thick pine ceiling ceiling lining.

Window frames. 150 mm x 75 mm s/h ms. oregon window frames.


glass to comply with code 1288.

Insulation. 75 mm fibre glass insulation.


sisilation to be laid over ceiling lining.

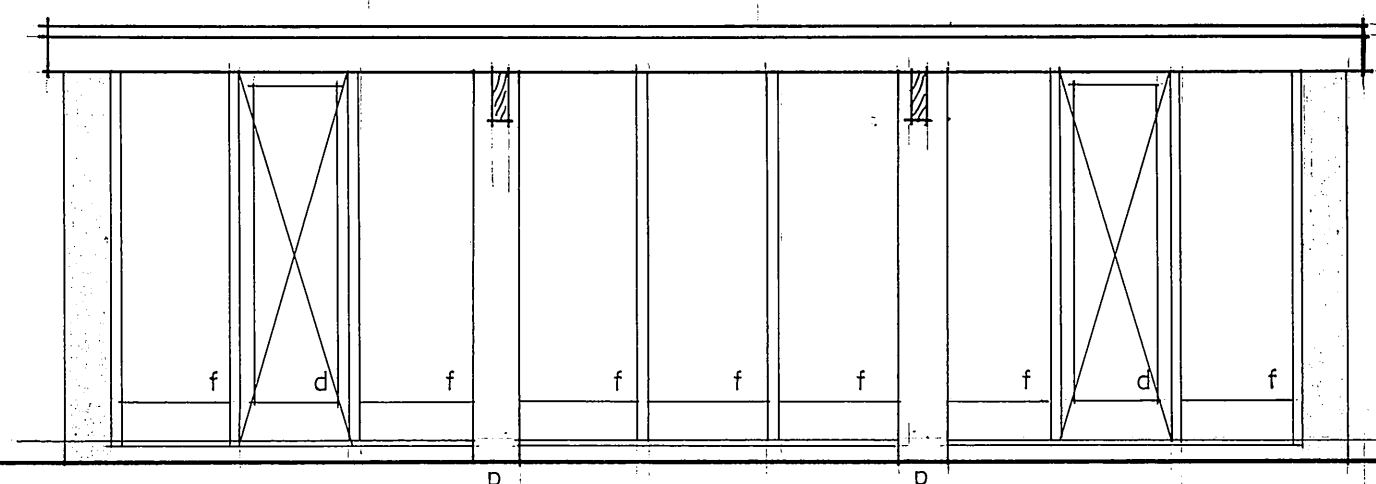


South Elevation

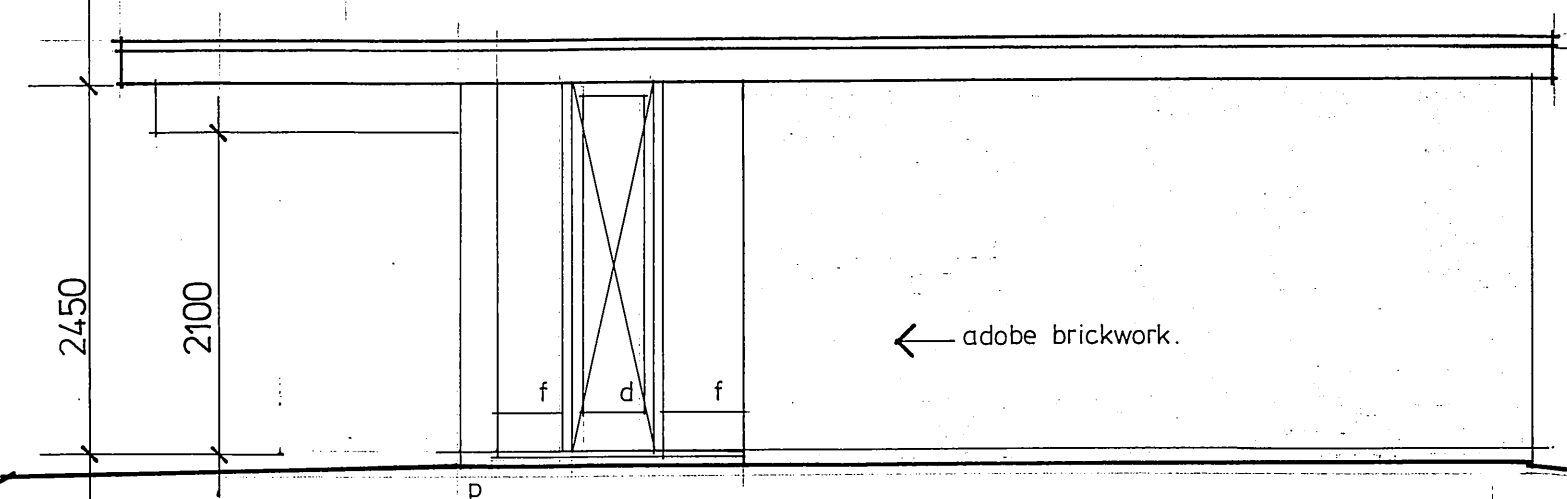

East Elevation.

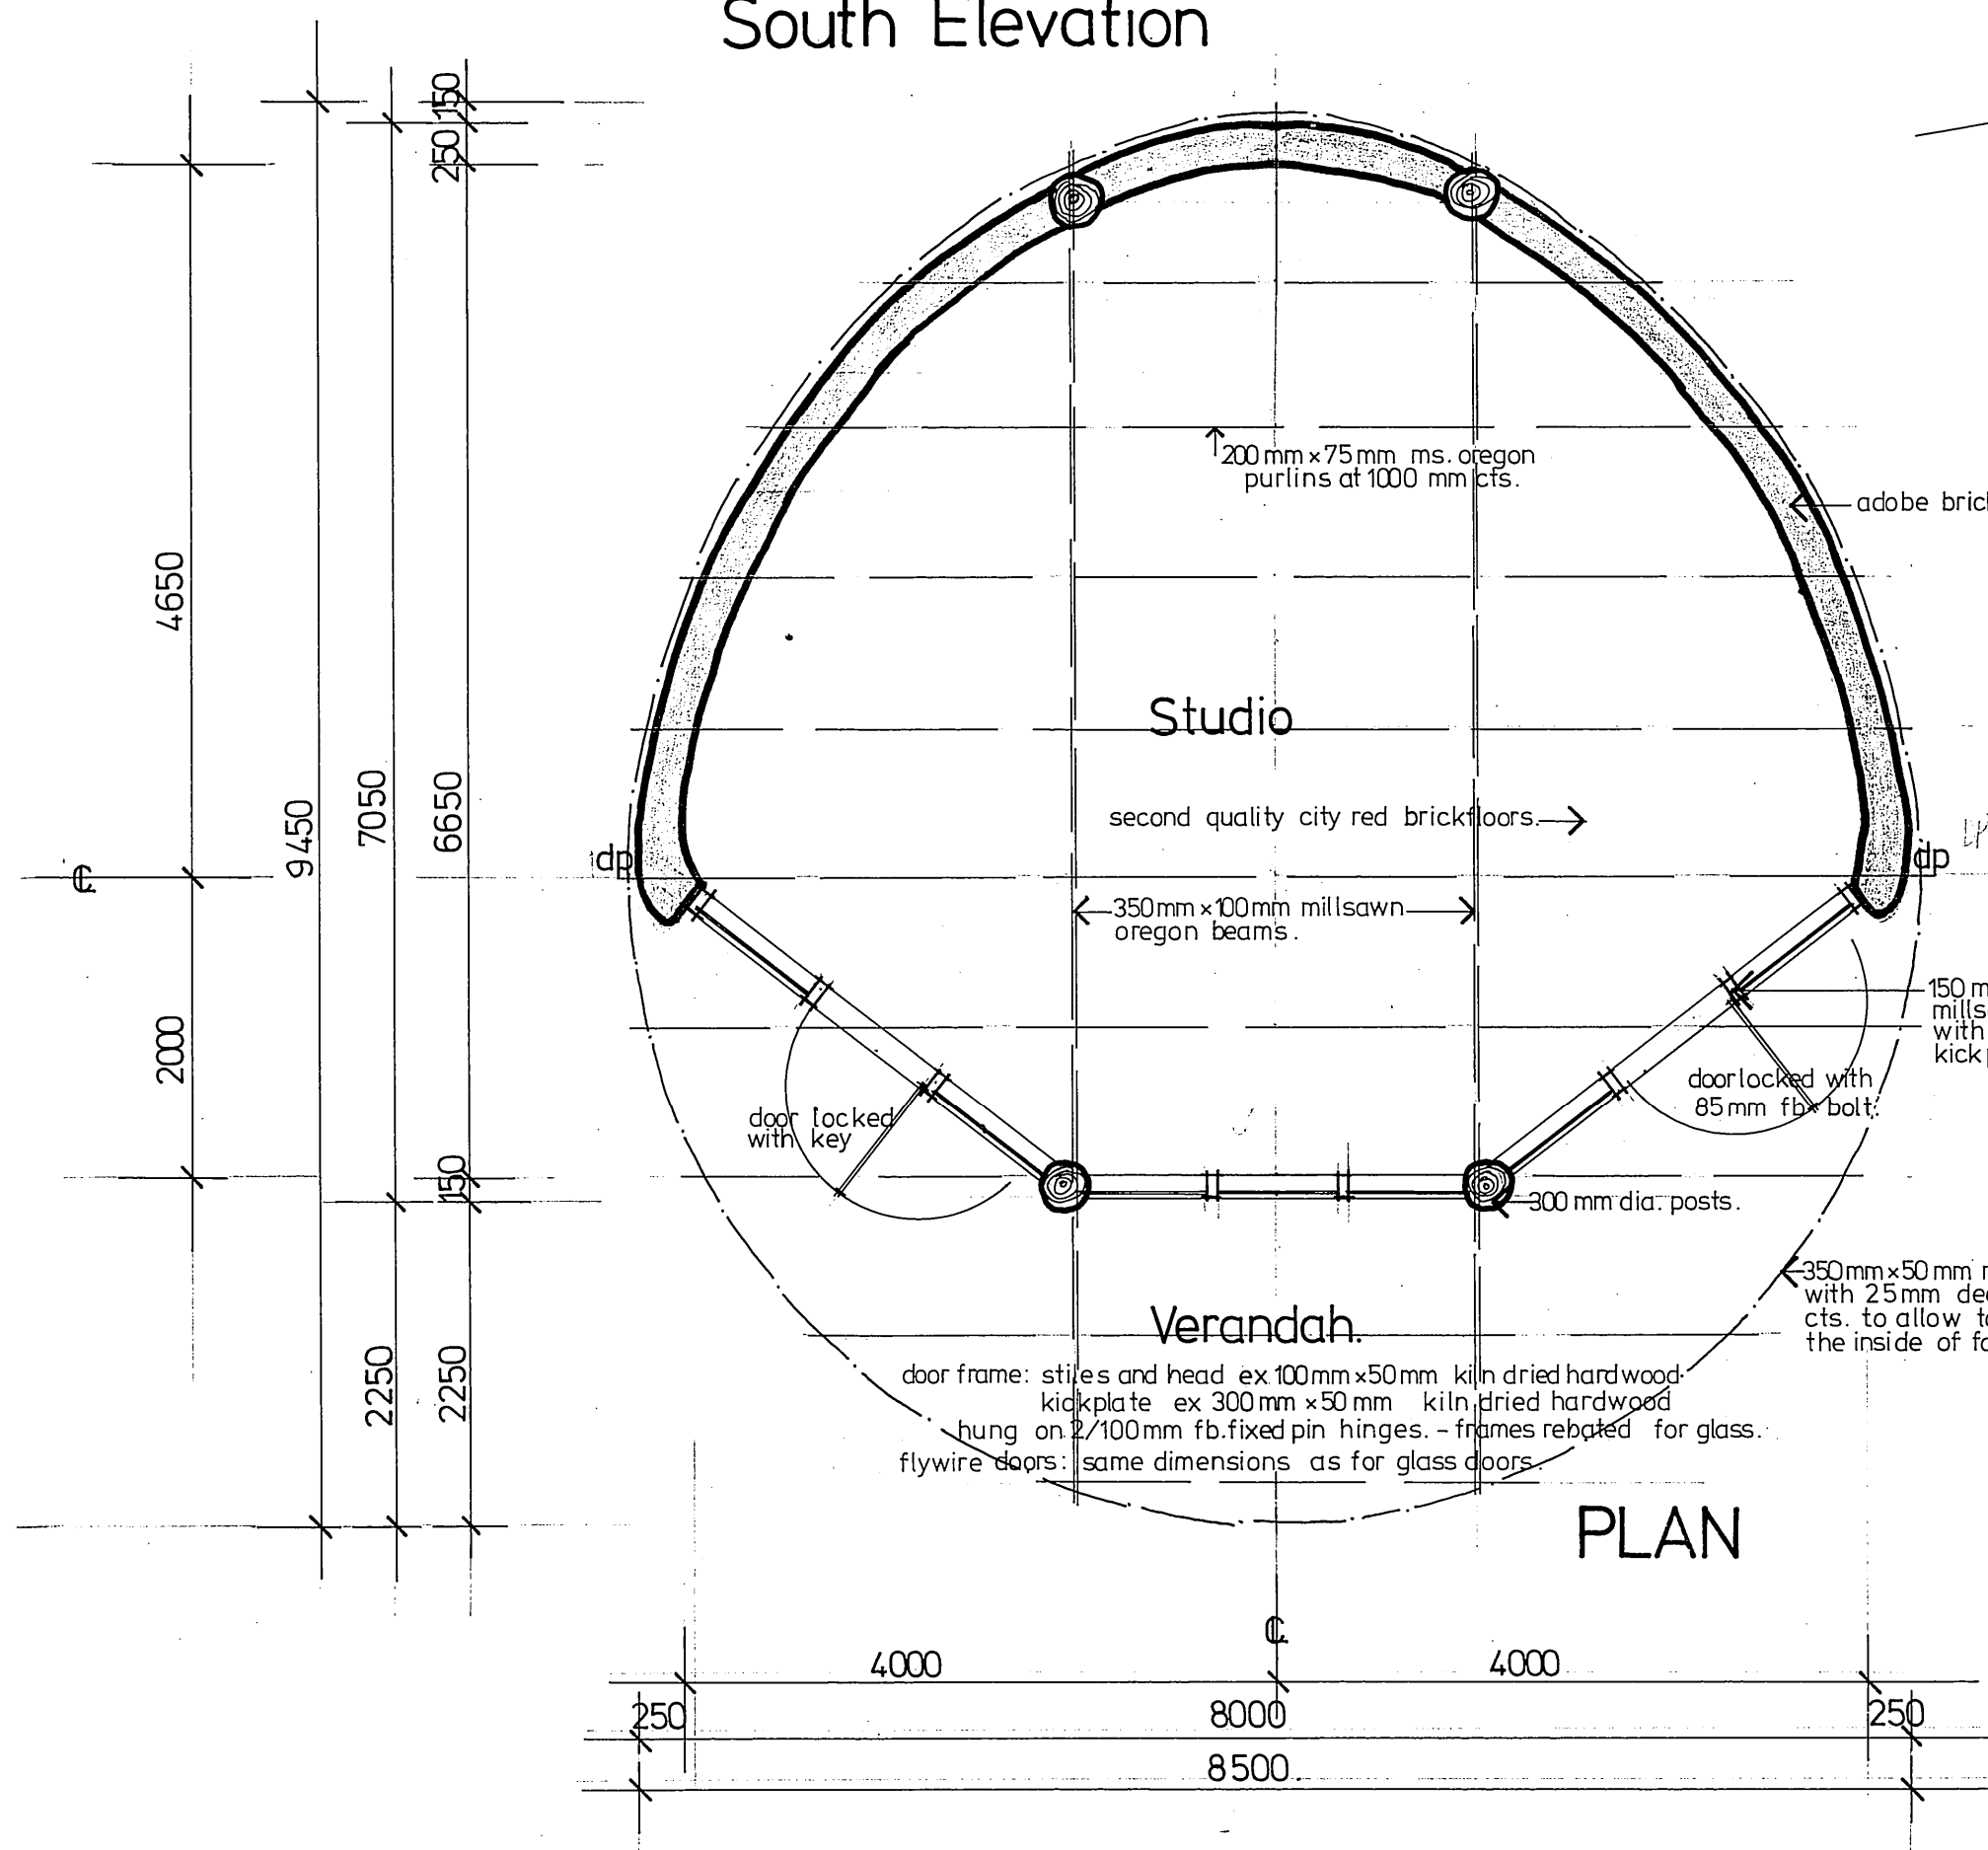

PLAN

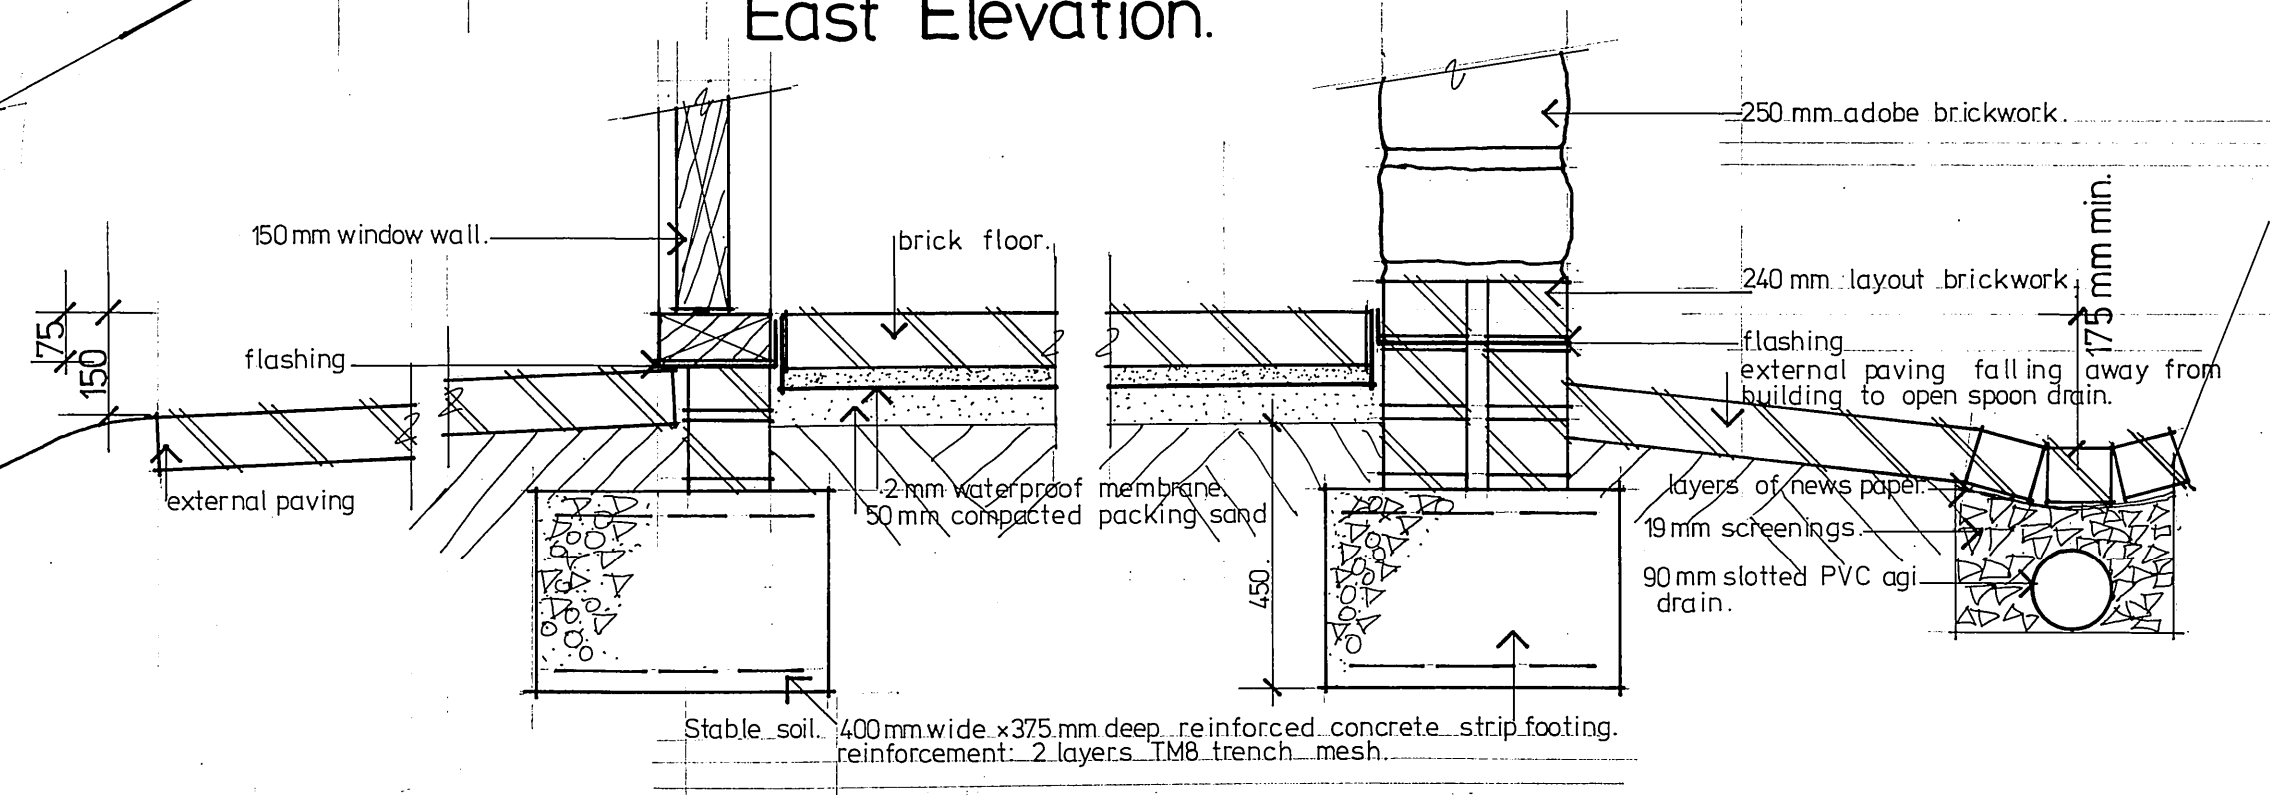

Lot 177 Sherbrooke st. No. 16.

Site Plan.

Proposed STUDIO for,
Peter + Dorothy MITCHELL.
16 Sherbrooke st. North Eltham.

ALISTAIR KNOX + ASSOCIATES.
Mt. Pleasant road, Eltham- 439-7404

scale: 1-50
date: September 1981.