




north elevation

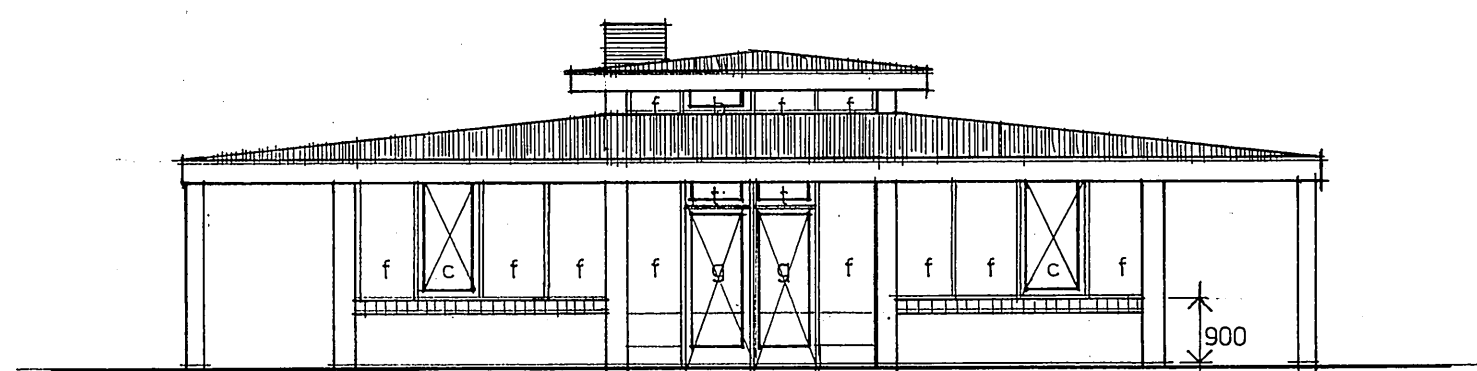



east elevation

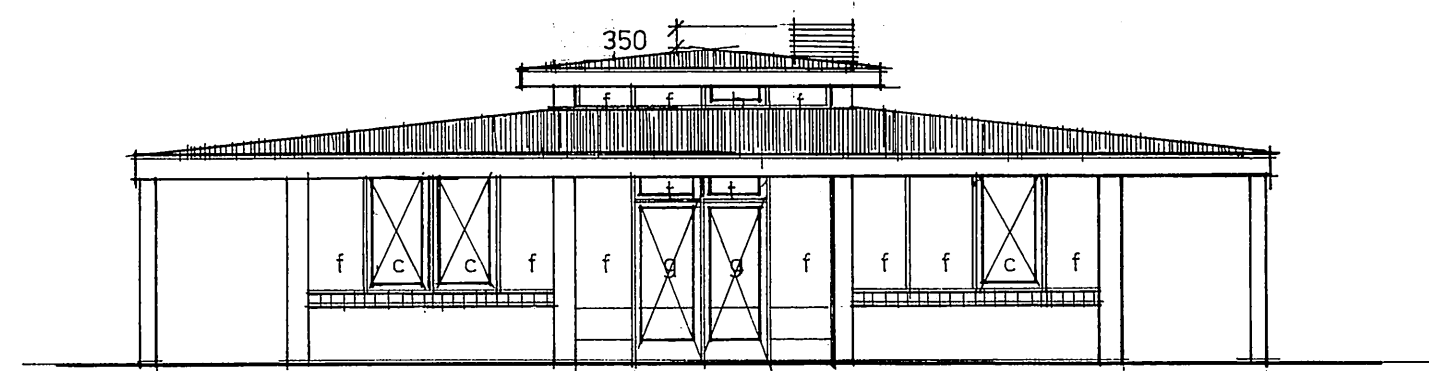



west elevation

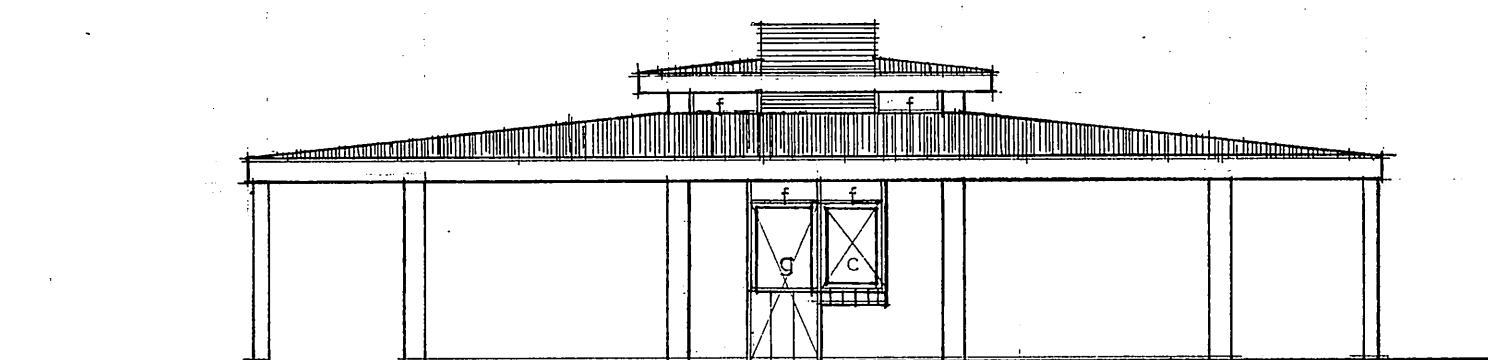


south elevation

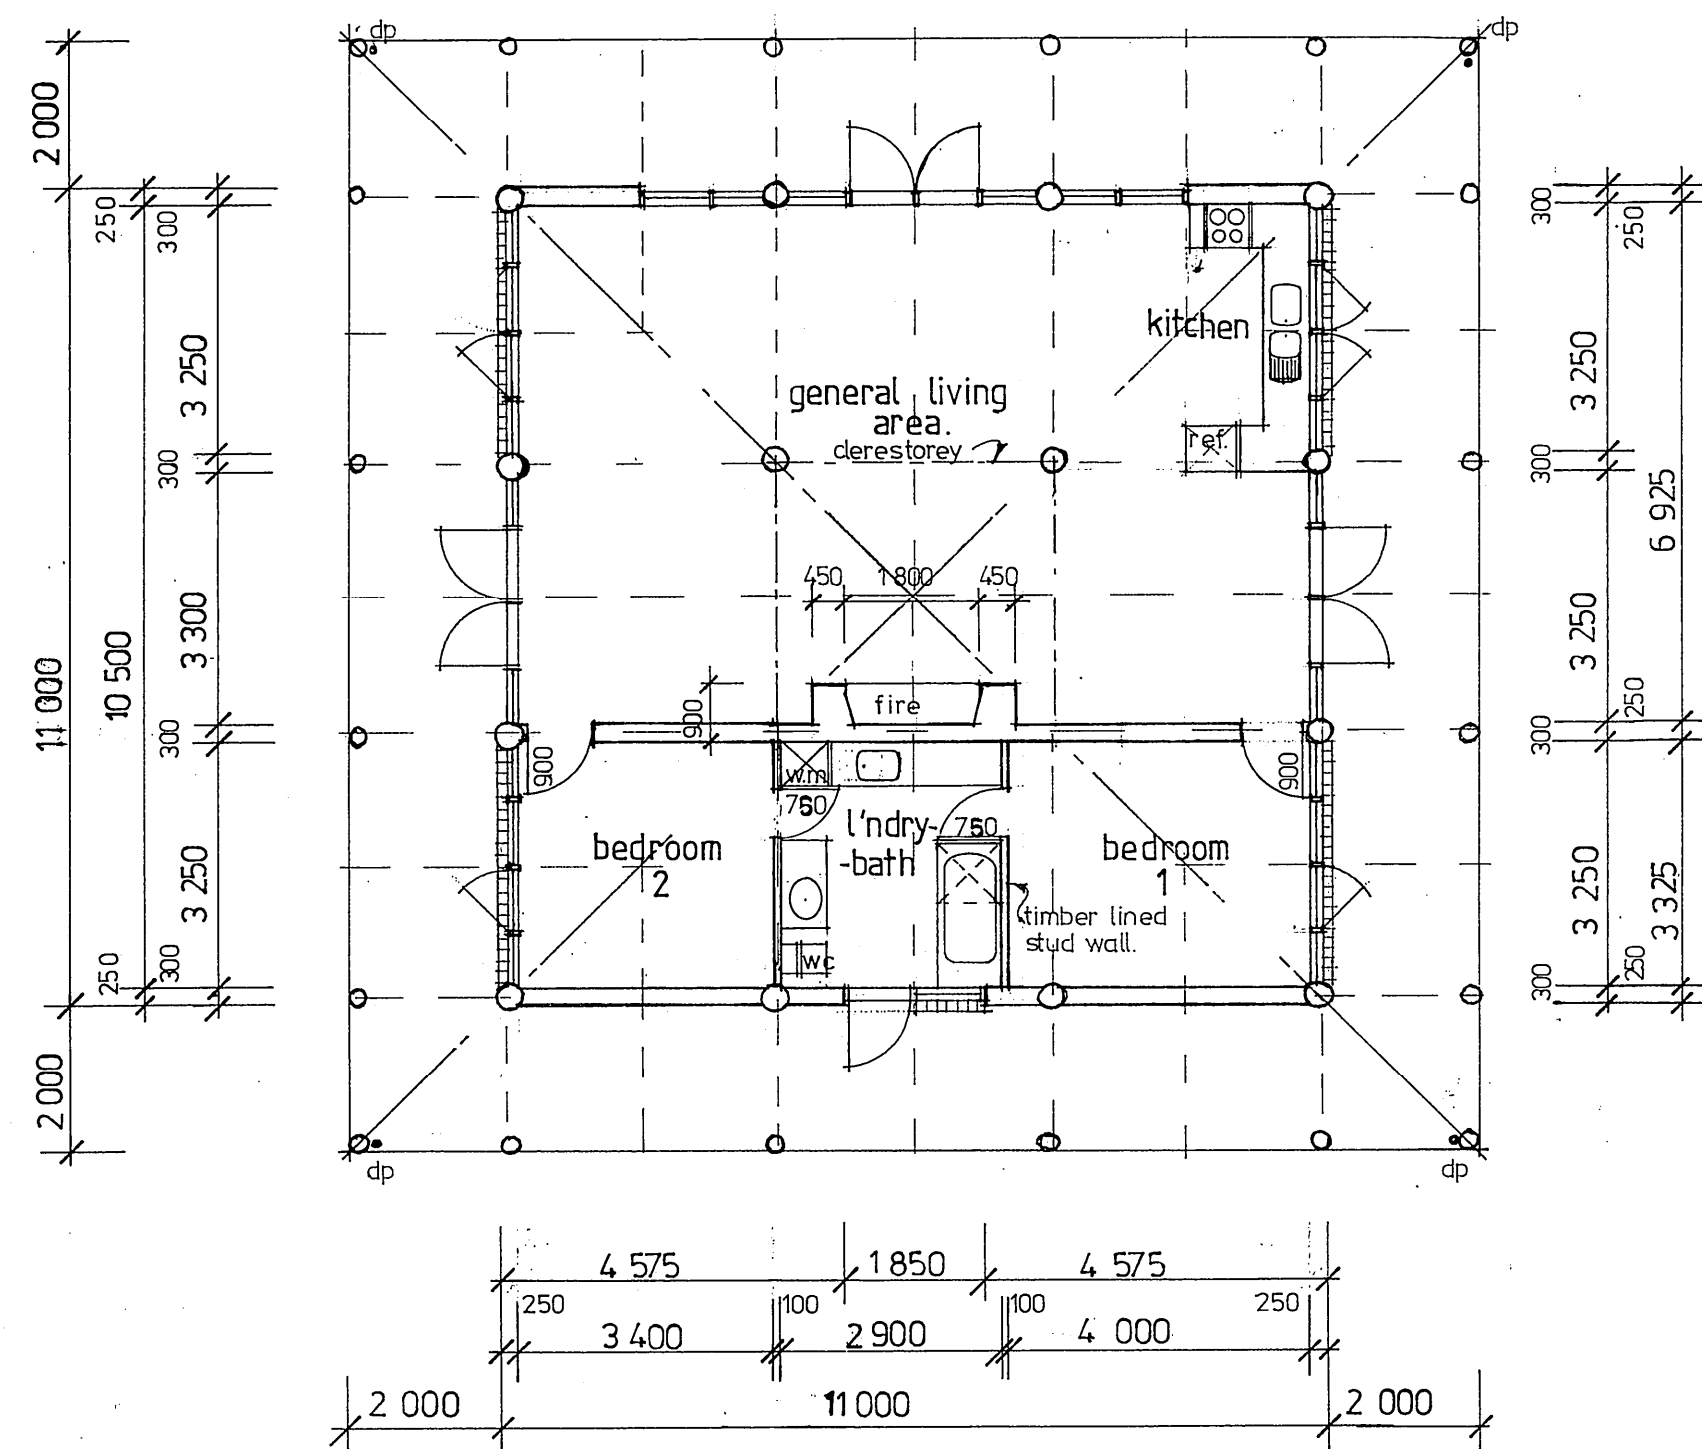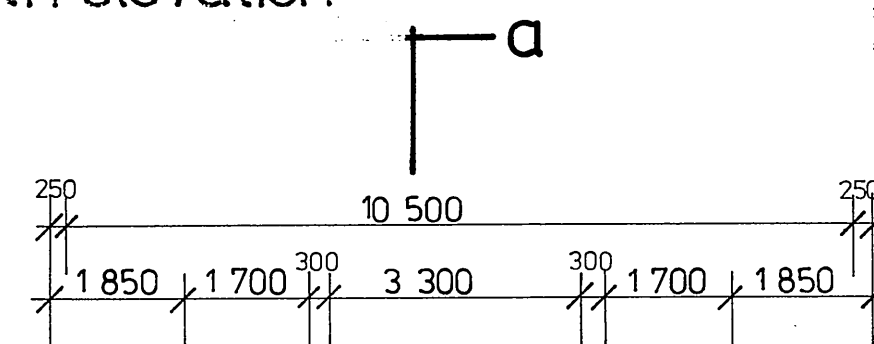

floor plan

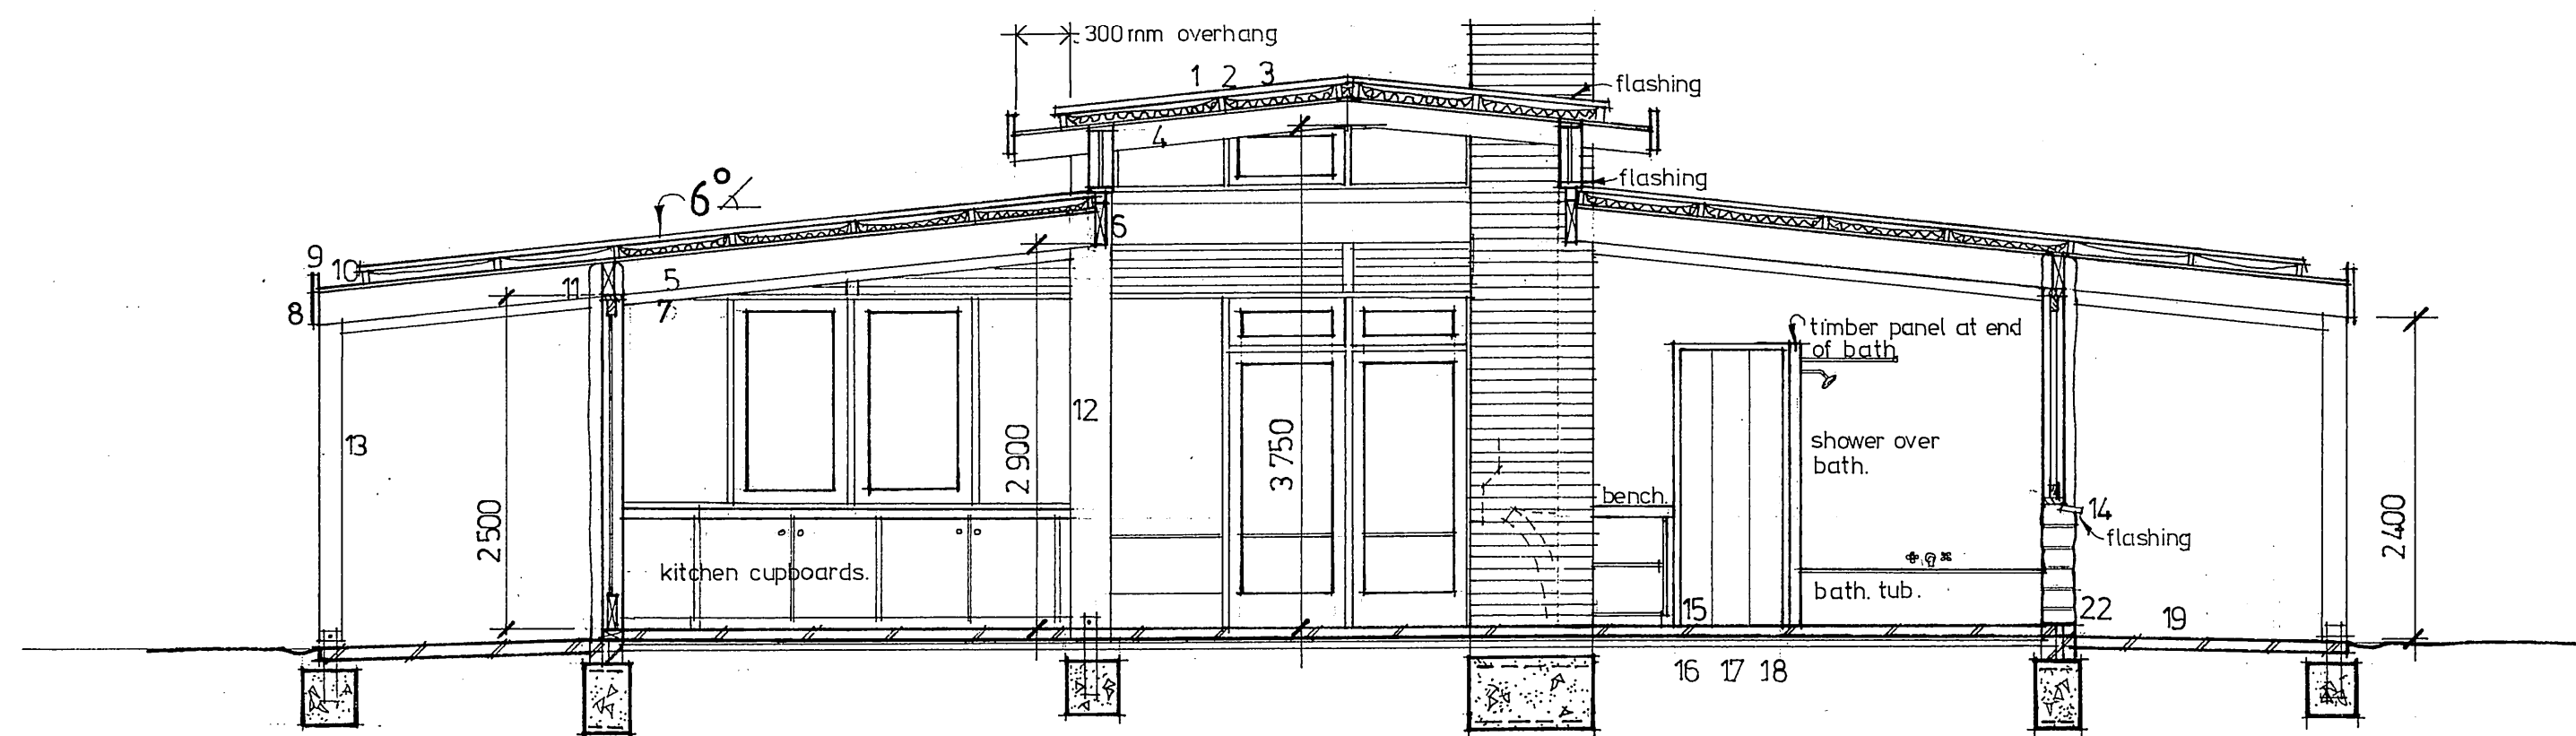

section a-a 1:50

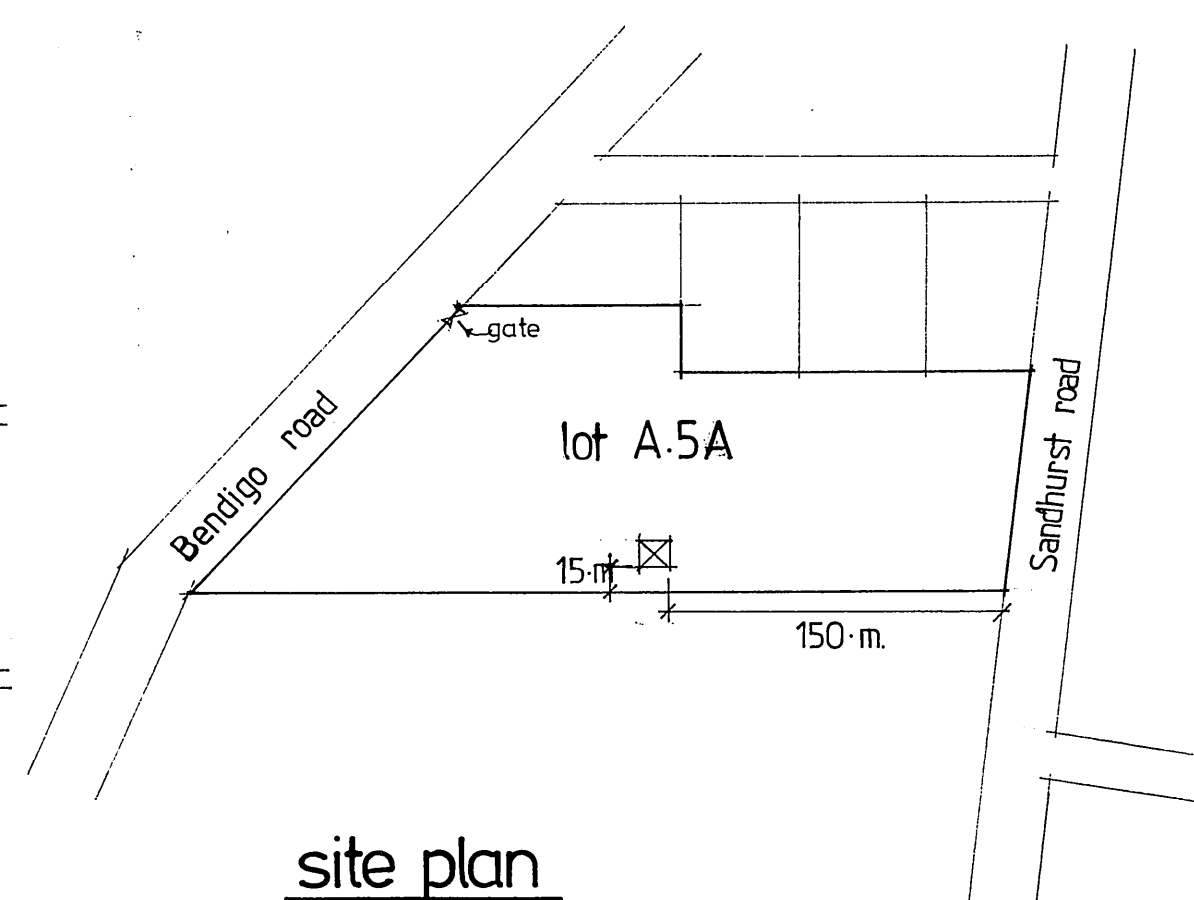

site plan

crown allotment No A5A
no section No
parish of Neilborough

- 1 zincalume, corrugated iron.
- 2 50 mm fibreglass insulation with sisilation
- 3 100x50 mm hwd. battens on edge.
- 4 19 mm timber floor boards, as ceiling
- 5 250x75 millsawn oregon/hwd rafters.
- 6 300x75 " beam under clerestorey.
- 7 400x100 millsawn oregon hip beams.
- 8 350x50 millsawn oregon fascia.
- 9 capping
- 10 300mm wide gutter.
- 11 250x50 packing above windows.
- 12 timber posts from light poles or bushpoles.-to be held down to footing or pad by a steel strip bolted to post and secured in concrete.
- 13 timber verandah posts, also secured like interior posts.
- 14 terracotta tile sill.
- 15 brick floor
- 16 25 mm mortar bed
- 17 waterproof membrane
- 18 50 mm packing sand
- 19 brick paving
- 20 525x350 footing with 2 layers of F11 tm. top & bottom.
- 21 400x400x400 deep concrete pads under all posts not on footing.
- 22 layout brickwork containing dpc's, etc.

- f fixed glazing
- c casement
- t top hung casement
- b bottom hung casement
- g glass door
- cross indicates flyscreen
- dp down pipe
- spray under floor for termites, etc.
- check all dimensions prior to start.

TURNBULL HOUSE — RAYWOOD

design Alistair Knox & Associates.
Mt. Pleasant rd, Eltham. 439 7404

drawn Danny
date may 85
scale 1:100, 1:50

job No 1238 P.T.L.

