




East Elevation

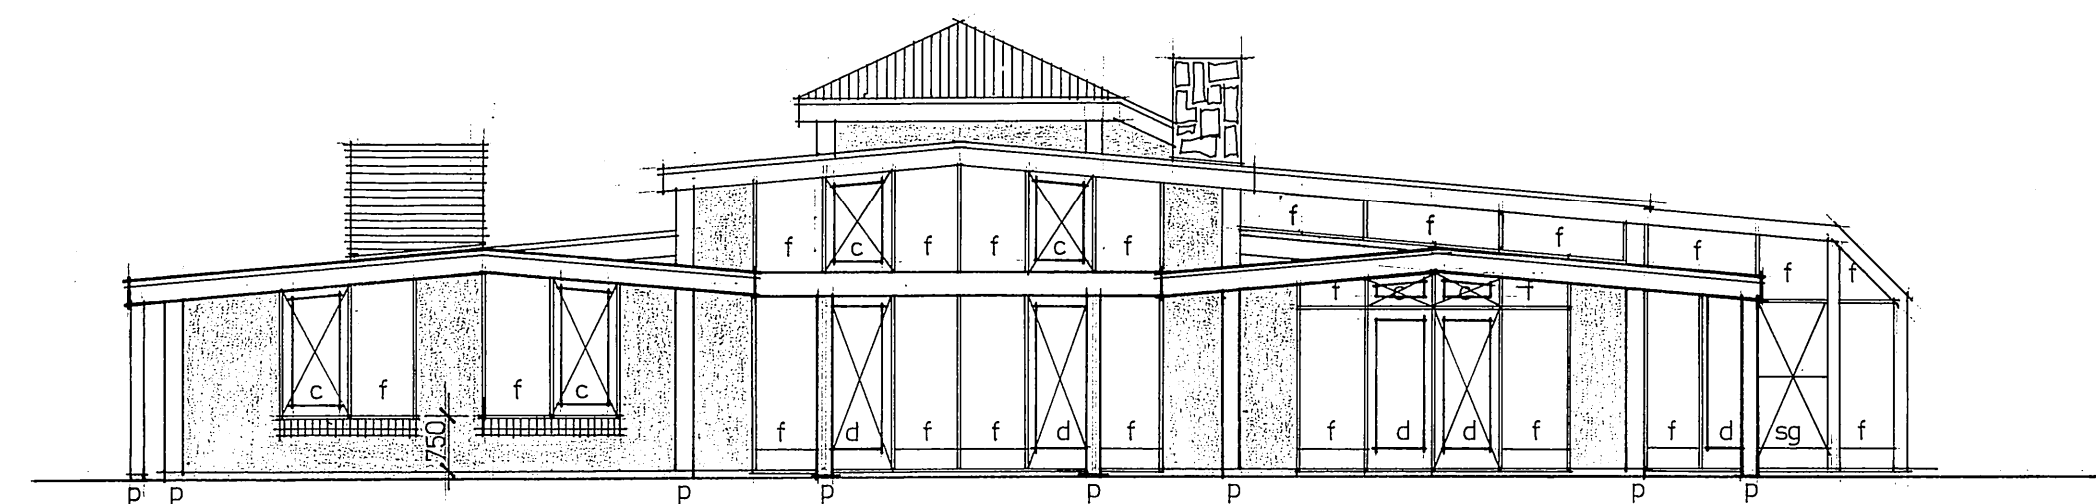

North Elevation

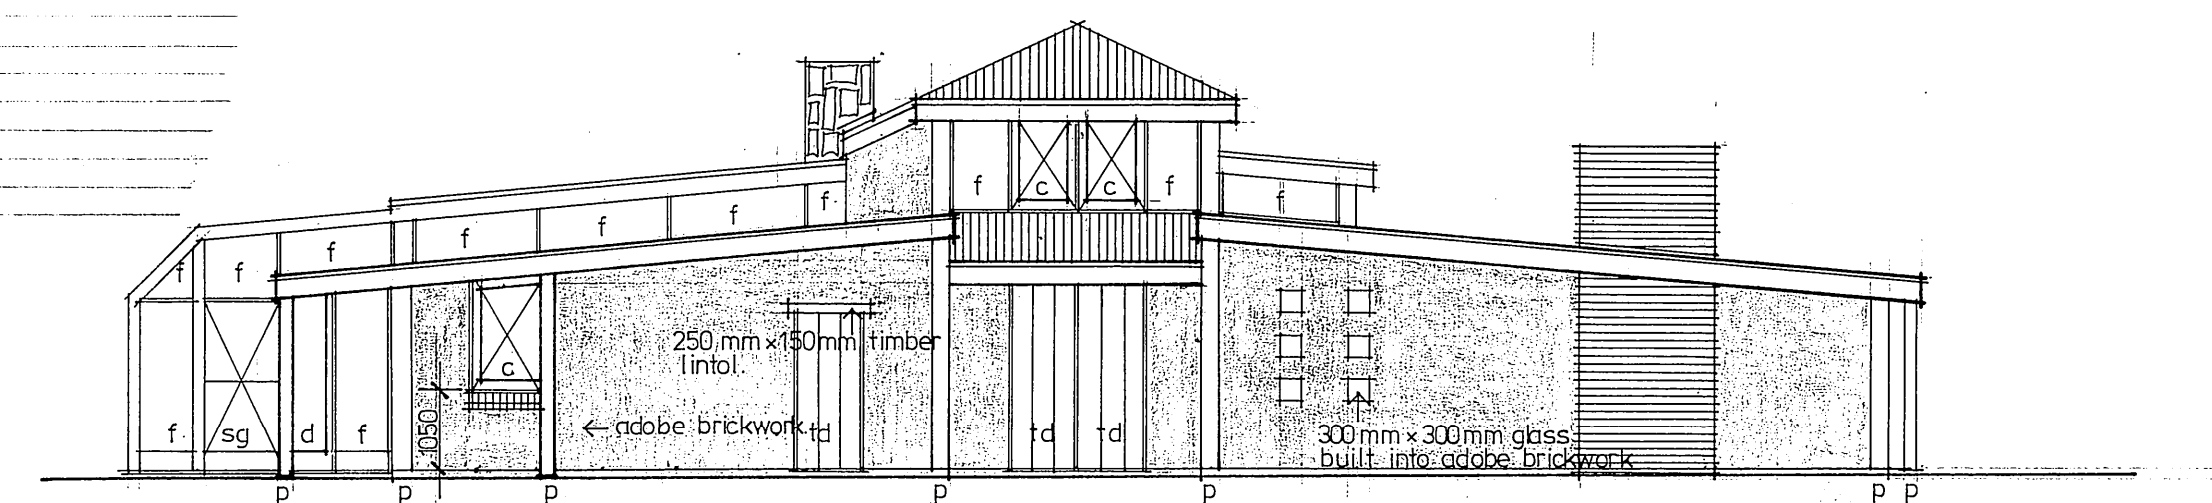

South Elevation

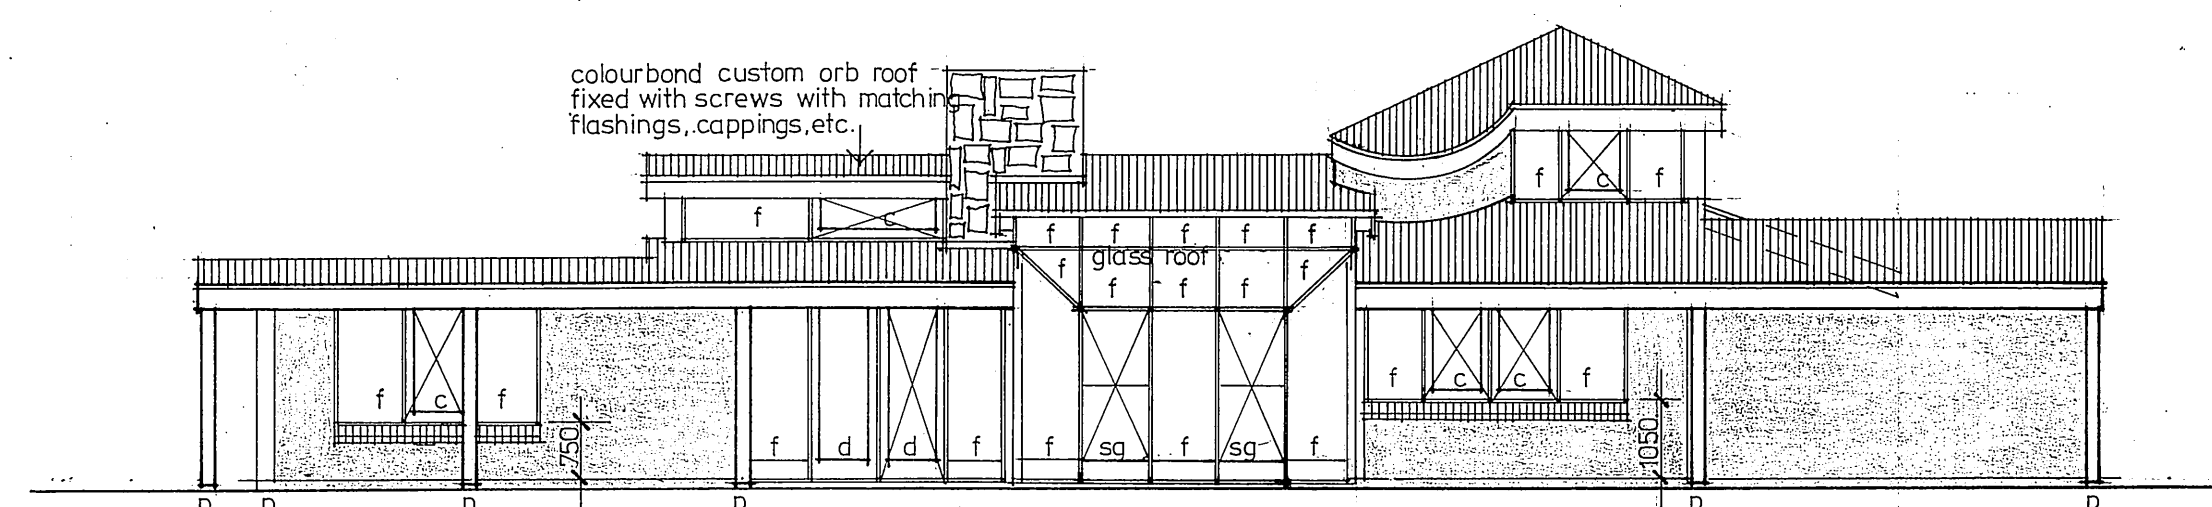


West Elevation

Notes to builder.

unless otherwise specified all oregon shall have a stress grade of F8.
all secondhand materials must be approved by the building surveyor.
spray under dwelling against sub-terrian pests to A.S. 2057-1977
internal doors - widths as indicated on the plan x 2040 mm high minimum. - where in adobe wall jambs to be 150mm x 75mm oregon with 250mm x 150 mm head/lintel.
posts - verandah - nominally 175 mm sq. millsawn oregon.
main - nominally 250 mm sq. hardwood or similar.
window frames - to be constructed from 150 mm x 75 mm millsawn oregon heads and mullions with jarrah or similar sills to full length frames.
see engineers dwgs and details for comps. on beams, slabs etc.

Proposed dwelling for,
Mr.+Mrs. D. WHITBY
Ridge road, Kalorama.

Designed by,
Alistair Knox and Associates.
Mount Pleasant road, Eltham 439-7404.
Scale: 1-100
Date: November 1982.
amended to council requirements Feb/March 1983.

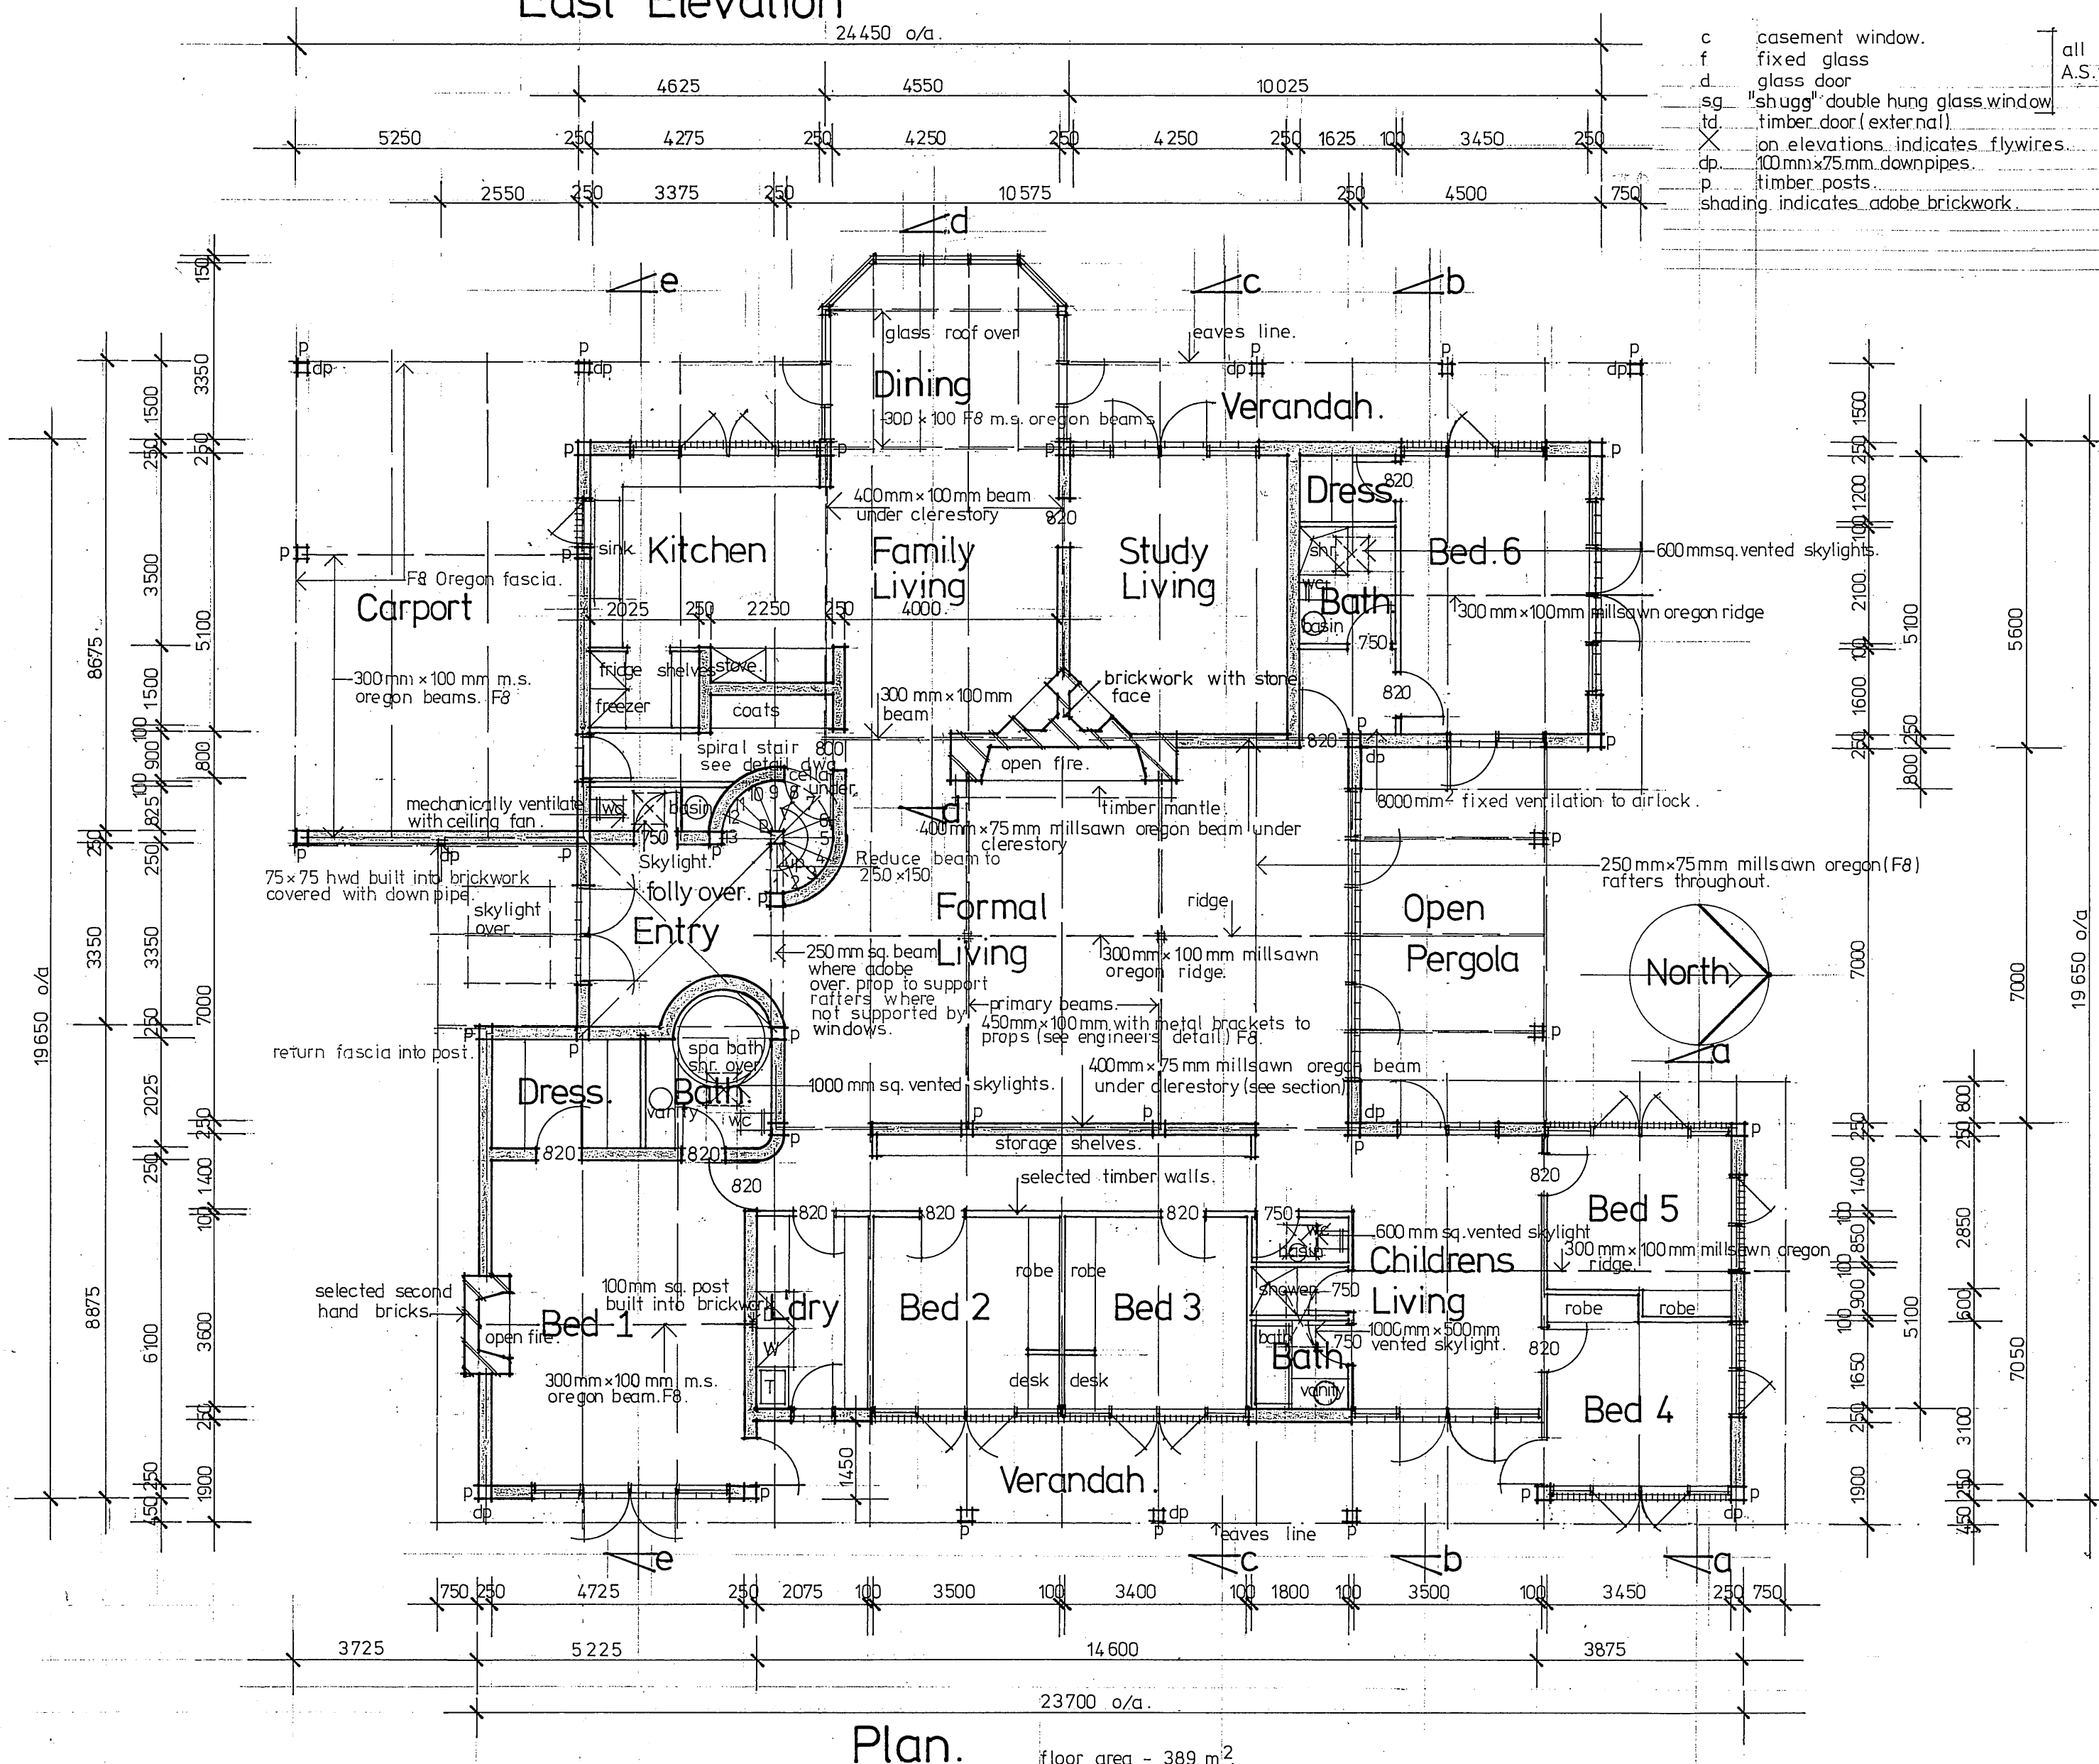

Plan.

floor area - 389 m²